

# FY 2025 Consultant Acquisition Plan

## Florida's Turnpike Enterprise

*As of 1/19/24*





An aerial photograph of a multi-lane highway, likely a turnpike, with a green semi-transparent overlay. The text "PD&E / CSC & DESIGN PROCUREMENT" is centered in white. The highway has several lanes in each direction, with a large truck and a car visible. The surrounding area includes trees and some buildings in the distance.

# PD&E / CSC & DESIGN PROCUREMENT



# PD & E Studies



Ad No	Formal Ad	FPID	Project	Selection Method
25814	October 2024	444006-1	PD&E WIDEN TPK (SR 91) FROM SOUTH OF SAND LAKE RD TO SOUTH OF SR 408 (MP 257-263)	LOR & ORAL PRESENTATION

# PD&E – WIDEN TPK(SR 91) FROM SOUTH OF SAND LAKE RD TO SOUTH OF SR 408 MP 257-263

PM	Jazlyn Heywood (407) 264-3298
Ad No / FPID(s)	Ad 25814 / 444006-1-22-01
County/Counties	Orange
Anticipated Contract \$	\$4.20
Anticipated Formal Ad	October 2024
Anticipated Contract Execution	April 2025
Anticipated Major / Minor Work Types	Major – 2.0, 3.3 Minor - 4.1.1, 4.1.2, 6.1, 6.2, 6.3.1, 6.3.2, 6.3.3, 7.1, 7.2, 7.3, 8.1, 8.2, 8.3, 8.4, 9.1, 9.2, 9.4.1, 14.0 and 15.0

General Project Description and Key Components
This study evaluates Turnpike Mainline (SR 91) widening from south of Sand Lake Rd to the south of SR 408 (MP 257 – 263) in Orange County. Includes evaluation of a potential new interchange and I-4 Interchange improvements.



# Continuing Services Contracts

Ad No	Formal Ad	Contract	Selection Method
25818	July 2024	CONTINUING SERVICES CONTRACT – DESIGN SUPPORT <b>(Small Business Reserved)</b>	ELOR
25819	May 2024	CONTINUING SERVICES CONTRACT – DESIGN SUPPORT	ELOR
25815 1 Ad / 3 Contracts	October 2024	CONTINUING SERVICES CONTRACT – ROW SERVICES	ELOR
		CONTINUING SERVICES CONTRACT – ROW SERVICES	
		CONTINUING SERVICES CONTRACT – ROW SERVICES	
25820	February 2025	CONTINUING SERVICES CONTRACT – SURVEY & MAPPING	ELOR

*Ad No 25815 will be one (1) advertisement / three (3) contracts*

**Dates are subject to change**



# Resurfacing Projects


Ad No	Formal Ad	FPID	Project	Selection Method
25801	June 2024	451366-1	SUNCOAST PKWY (SR589) IN HILLSBOROUGH CNTY, MP 14.3 TO 17.5	ELOR
25802 Lead Project		451365-1	SUNCOAST PKWY (SR 589) IN PASCO COUNTY MP 28.5 TO MP 37.3	ELOR
25803		447701-1	SUNCOAST (SR 589) IN HERNANDO COUNTY MP 37.3-44.5	ELOR

*One (1) Advertisement / three (3) Contracts. TRC will evaluate and score firms based on the lead project (Ad 25802 / 451365-1); however, all competing firms should also familiarize with Ad No 25801 / 451366-1 and Ad No 25803 / 447701-1 scope elements.*

# RESURFACE SUNCOAST PKWY (SR589) IN HILLSBOROUGH CNTY MP 14.3 TO 17.5

PM	Anthony Miller (407) 750-3706
Ad No / FPID(s)	Ad 25801 / 451366-1-32-01
County/Countries	Hillsborough
Anticipated Contract \$	\$1.50
Anticipated Formal Ad	June 2024
Anticipated Contract Execution	October 2024
Anticipated Major/Minor Work Types	Major – 3.3 Minor – 3.1, 3.2, 4.1.1, 4.1.2, 5.1, 6.3.1, 6.3.2, 6.3.3, 7.1, 8.1, 8.2, 9.1, 9.2, 9.4.1


General Project Description and Key Components
<p>This project will mill, resurface, and provide safety improvements of the Suncoast Parkway from north of Van Dyke Road to Hillsborough County Line (MP 14.3 – 17.5) in Hillsborough County. This includes interchanges with CR685A/Van Dyke Road and Lutz Lake Fern Road. An ERCAR is prepared under FPID 451366-2-32-01, summarizing existing conditions and recommended improvements.</p>

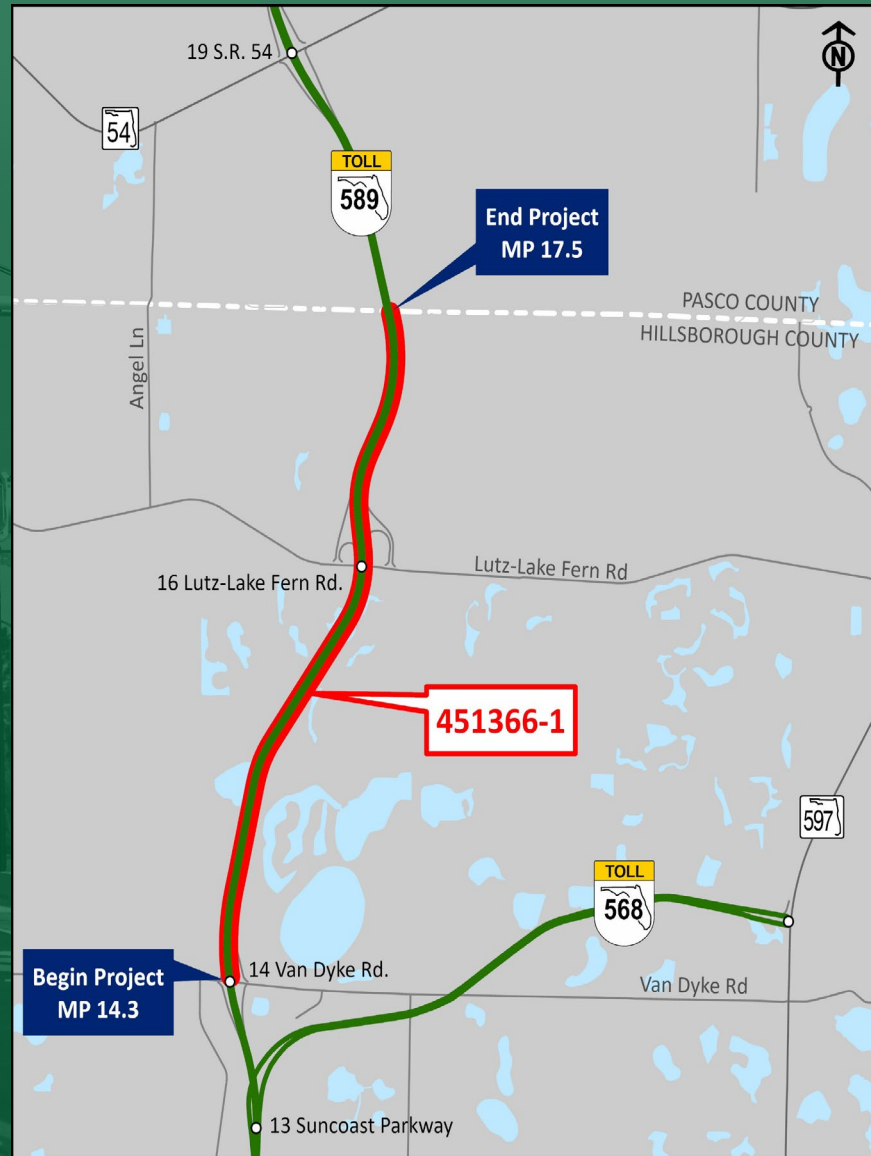

# RESURFACE SUNCOAST PKWY (SR 589) IN PASCO COUNTY MP 28.5 TO MP 37.3


PM	<b>Anthony Miller (407) 750-3706</b>
Ad No / FPID(s)	Ad 25802 / 451365-1-32-01
County/Counties	Pasco
Anticipated Contract \$	\$2.39
Anticipated Formal Ad	June 2024
Anticipated Contract Execution	November 2024
Anticipated Major/Minor Work Types	Major – 3.3 Minor – 3.1, 3.2, 4.1.1, 4.1.2, 5.1, 6.3.1, 6.3.2, 6.3.3, 7.1, 8.1, 8.2, 9.1, 9.2, 9.4.1

General Project Description and Key Components
<p>This project will mill, resurface, and provide roadside safety improvements of the Suncoast Parkway (SR 589) from north of SR 52 to south of County Line Road (MP 28.5 – 37.3 ) in Pasco County. This includes interchanges with CR578/County Line Road and SR 52. An ERCAR is prepared under FPID 451365-2-32-01, summarizing existing conditions and recommended improvements.</p>

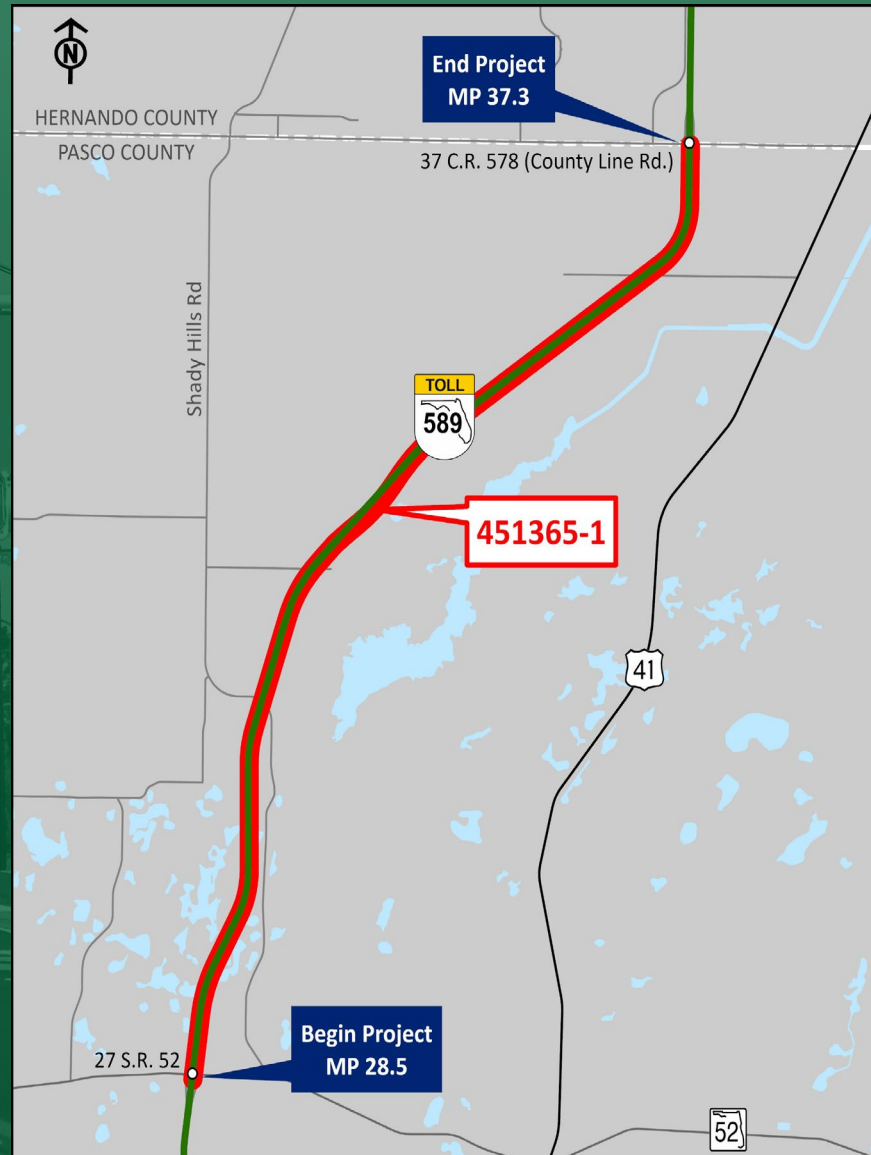



# RESURFACE SUNCOAST (SR 589) IN HERNANDO COUNTY MP 37.3-44.5

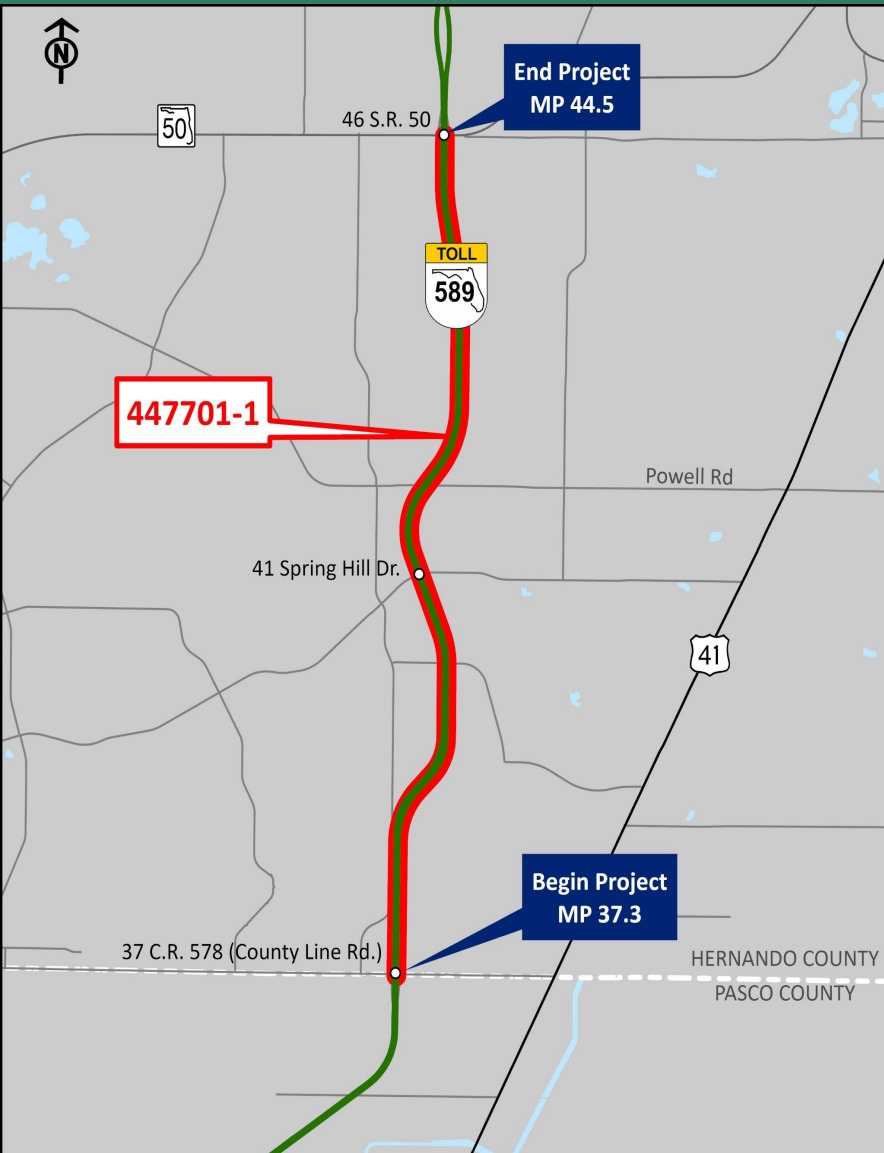

PM	Ruby Monsalve (407) 264-3005
Ad No / FPID(s)	Ad 25803 / 447701-1-32-01
County/Counties	Hernando
Anticipated Contract \$	\$1.55
Anticipated Formal Ad	June 2024
Anticipated Contract Execution	November 2024
Anticipated Major/Minor Work Types	Major – 3.3 Minor – 3.1, 3.2, 4.1.1, 4.1.2, 5.1, 6.3.1, 6.3.2, 6.3.3, 7.1, 7.2, 7.3, 8.1, 8.2, 9.1, 9.2, 9.4.1

### General Project Description and Key Components

This project will include milling, resurfacing, and provide safety improvements of the Suncoast Parkway (SR 589) from north of County line road to SR 50 (MP 37.3-44.5) in Hernando County. This includes interchanges with County line road, Spring Hill Dr and SR 50. An ERCAR is prepared under FPID 447701-2-22-01, summarizing existing conditions and recommended improvements.

# Capacity / Widening

Ad No	Formal Ad	FPID	Project	Selection Method
25804 Lead Project	September 2024	446218-1 & 446219-1	WIDEN TPK(SR91) FROM SR706 TO MARTIN C/L (MP117-117.7) & WIDEN TPK(SR91), PALM BEACH C/L TO I-95 CONNECTOR (MP117.7-125)	LOR & ORAL PRESENTATION
25805		446332-1	WIDEN TPK(SR 91), I-95 CONNECTOR TO T.B.MANUEL BRIDGE (MP 125-131)	LOR & ORAL PRESENTATION
25806		446220-1	TPK(SR 91) INTERCHANGE IMPROVEMENTS AT SW PORT ST LUCIE BLVD (MP 143)	LOR & ORAL PRESENTATION
25807 Lead Project	July 2024	437224-1	WIDEN SAWGRASS(SR 869) FROM SR 7 TO POWERLINE RD (MP 18.4-22) (6 TO 10 LNS)	LOR & ORAL PRESENTATION
25808		452078-1	WIDEN TPK (SR91) N OF SAMPLE RD TO WILES RD (MP 69-70)	LOR & ORAL PRESENTATION
25812	October 2024	446618-1	THOMAS B MANUEL BRIDGE REPLACEMENT (SB ONLY) (MP 131.2)	LOR & ORAL PRESENTATION
25813	May 2024	452077-2	COCONUT CREEK INTERCHANGE MODIFICATIONS (MP 67)	LOR & ORAL PRESENTATION


*Ad No's 25804, 25805 and 25806 will be bundled as One (1) Advertisement / three (3) Contracts. TRC will evaluate and score firms based on the lead project (Ad 25804 / 446218-1 & 446219-1); however, all competing firms should also familiarize with Ad No 25805 / 446332-1 and Ad No 25806 / 446220-1 scope elements.*

*Ad No's 25807 and 25808 will be bundled as One (1) Advertisement / two (2) Contracts. TRC will evaluate and score firms based on the lead project (Ad No 25807 / 437224-1); however, all competing firms should also familiarize with Ad No 25808 / 452078-1 scope elements.*

**Dates are subject to change**



# WIDEN TPK(SR91) FROM SR706 TO MARTIN C/L (MP117-117.7) & WIDEN TPK(SR91), PALM BEACH C/L TO I-95 CONNECTOR (MP117.7-125)

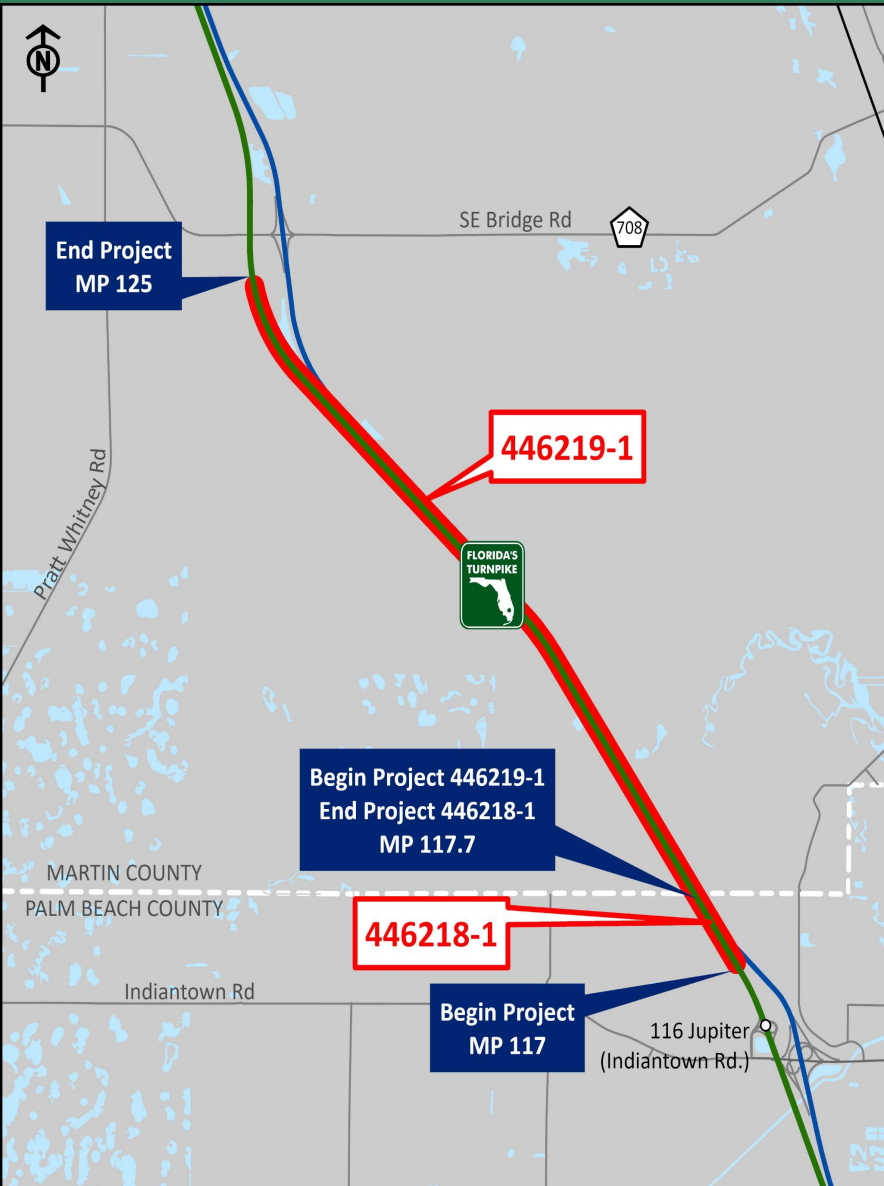


PM (Subject to Change)	Su Hao (407) 264 - 3189
Ad No / FPID(s)	Ad 25804 / 446218-1-32-01 & 446219-1-32-01
County/Counties	Palm Beach / Martin
Anticipated Contract \$	446218-1-32-01 - \$2.00 446219-1-32-01 - \$14.55
Anticipated Formal Ad	September 2024
Anticipated Contract Execution	March 2025
Anticipated Major/Minor Work Types	Major – 3.3, 4.1.2 Minor – 2.0, 4.1.1, 6.1, 6.2, 6.3.1, 6.3.2, 6.3.3, 7.1, 7.2, 7.3, 8.1, 8.2, 8.3, 8.4, 9.1, 9.2, 9.4.1, 15.0

## General Project Description and Key Components

These design projects will widen Turnpike Mainline (SR 91) from north of SR 706 to the future I-95 Connector (MP 117-125) in Palm Beach and Martin Counties. A PD&E for these projects was performed under FPID 423374-1-22-01, which summarizes the proposed improvements.

# WIDEN TPK (SR 91), I-95 CONNECTOR TO T.B. MANUAL BRIDGE MP 125 - 131

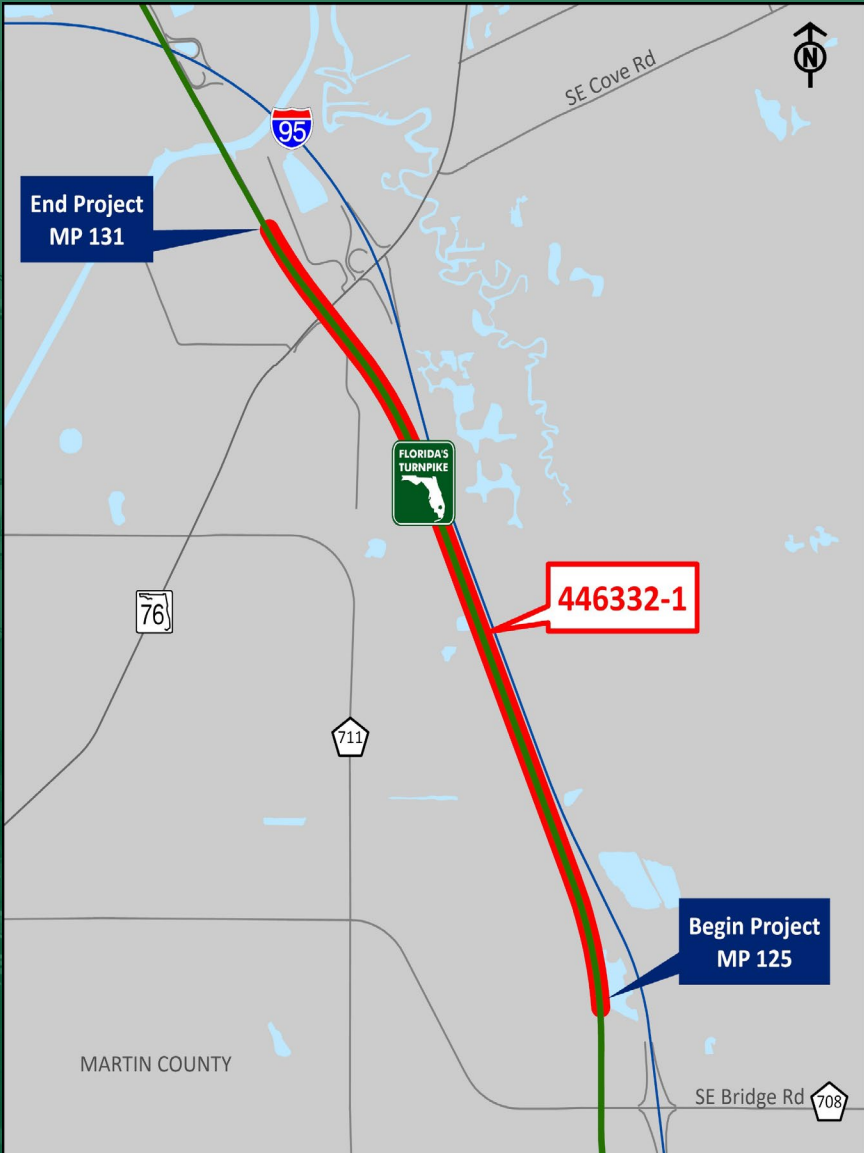


PM (Subject to Change)	Su Hao (407) 264 - 3189
Ad No / FPID(s)	Ad 25805 / 446332-1-32-01
County/Counties	Martin
Anticipated Contract \$	\$10.76
Anticipated Formal Ad	September 2024
Anticipated Contract Execution	April 2025
Anticipated Major/Minor Work Types	Major – 3.3, 4.1.2 Minor – 2.0, 4.1.1, 6.1, 6.2, 6.3.1, 6.3.2, 6.3.3, 7.1, 7.2, 7.3, 8.1, 8.2, 8.3, 8.4, 9.1, 9.2, 9.4.1, 15.0

General Project Description and Key Components
This design project will widen Turnpike Mainline (SR 91) from the I-95 Connector to the Thomas B Manuel Bridge (MP 125-131) in Martin County. A PD&E for this project was performed under FPID 423374-1-22-01, which summarizes the proposed improvements.



# TPK(SR 91) INTERCHANGE IMPROVEMENTS AT SW PORT ST LUCIE BLVD MP 143

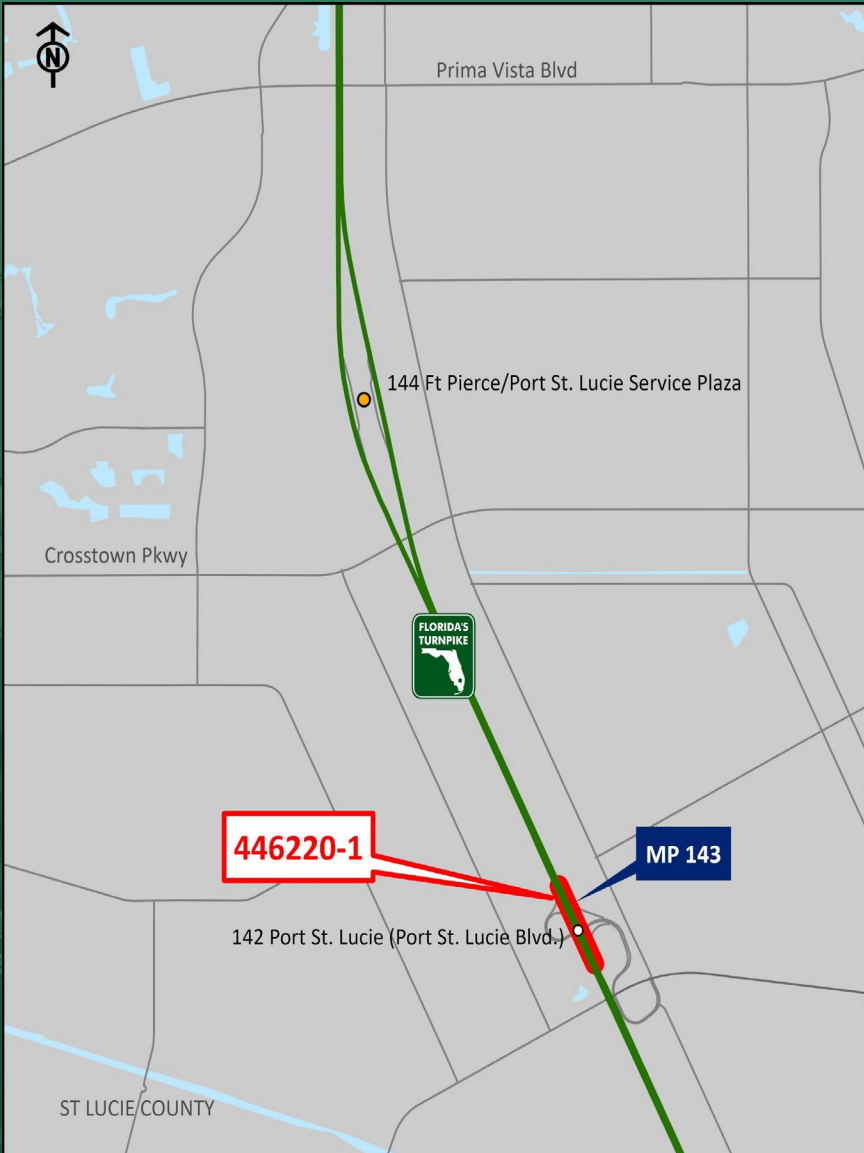


PM (Subject to Change)	Su Hao (407) 264 - 3189
Ad No / FPID(s)	Ad 25806 / 446220-1-32-01
County/Counties	St. Lucie
Anticipated Contract \$	\$4.30
Anticipated Formal Ad	September 2024
Anticipated Contract Execution	April 2025
Anticipated Major/Minor Work Types	Major – 3.3, 4.1.2 Minor – 2.0, 4.1.1, 6.1, 6.2, 6.3.1, 6.3.2, 6.3.3, 7.1, 7.2, 7.3, 8.1, 8.2, 8.3, 8.4, 9.1, 9.2, 9.4.1, 15.0

General Project Description and Key Components
This design project improves the Turnpike Mainline (SR 91) and SW Port St. Lucie Boulevard interchange (MP 143) in St. Lucie County. A PD&E for this project was performed under FPID 423374-1-22-01, which summarizes the proposed improvements.

# WIDEN SAWGRASS(SR869) FROM SR7 TO POWERLINE RD (6 TO 10 LNS) MP18.4-22


PM (Subject to Change)	Paul Naranjo (407) 264 – 3429
Ad No / FPID(s)	Ad 25807 / 437224-1-32-01
County/Counties	Broward
Anticipated Contract \$	\$12.00
Anticipated Formal Ad	July 2024
Anticipated Contract Execution	January 2025
Anticipated Major/Minor Work Types	Major – 3.3, 4.2.1, 4.2.2 Minor – 4.1.1, 4.1.2, 6.1, 6.2, 6.3.1, 6.3.2, 6.3.3, 7.1, 7.2, 7.3, 8.1, 8.2, 8.3, 8.4, 9.1, 9.2, 9.4.1, 14.0, 15.0

General Project Description and Key Components
This project widens a four-mile segment of Sawgrass Expressway/SR 869 from US 441/SR 7 to Powerline Road. Major interchange improvements are being evaluated as part of the PD&E Study under FPID 437153-1, which includes a study of new ramps to and from the east; enhancing the system’s interchange between Sawgrass Expressway/SR 869 and Florida’s Turnpike Mainline/SR 91.

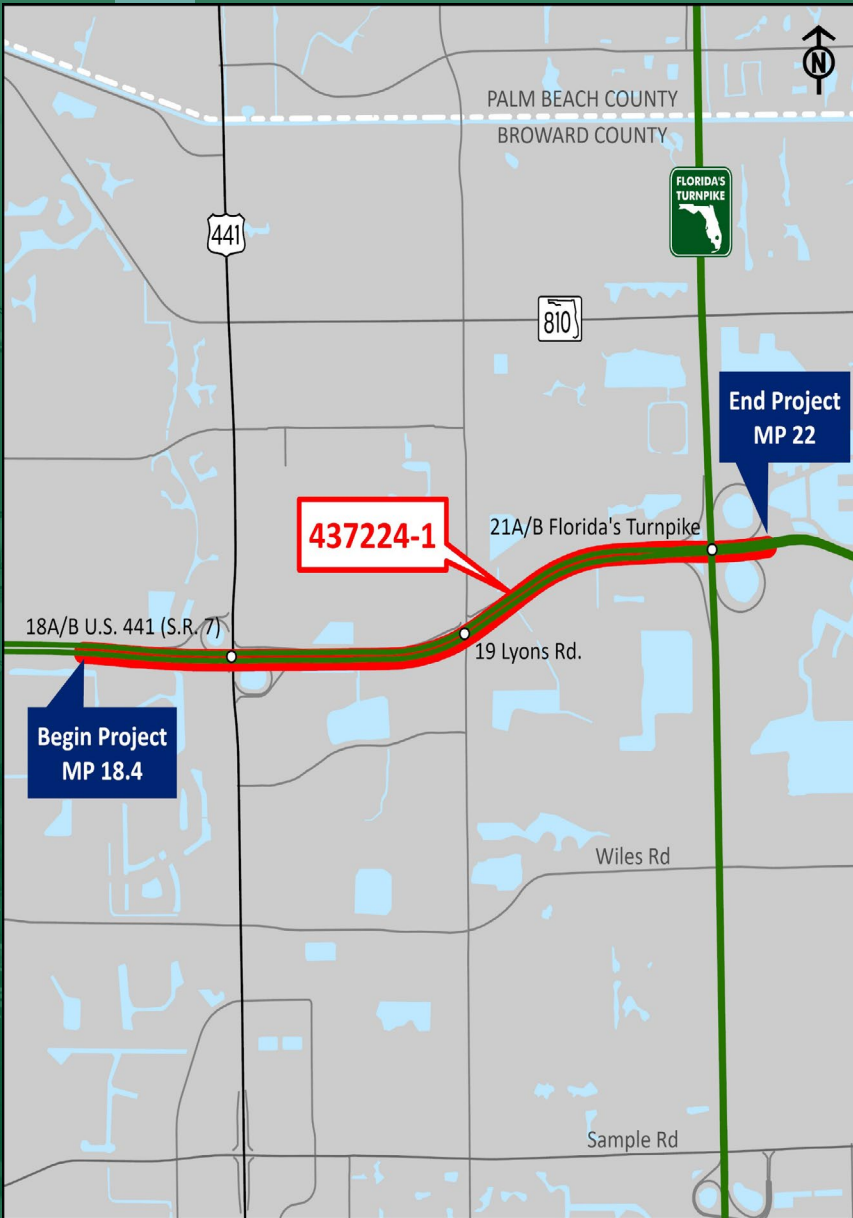




# WIDEN TPK (SR 91) NORTH OF SAMPLE RD TO WILES RD MP 69-70

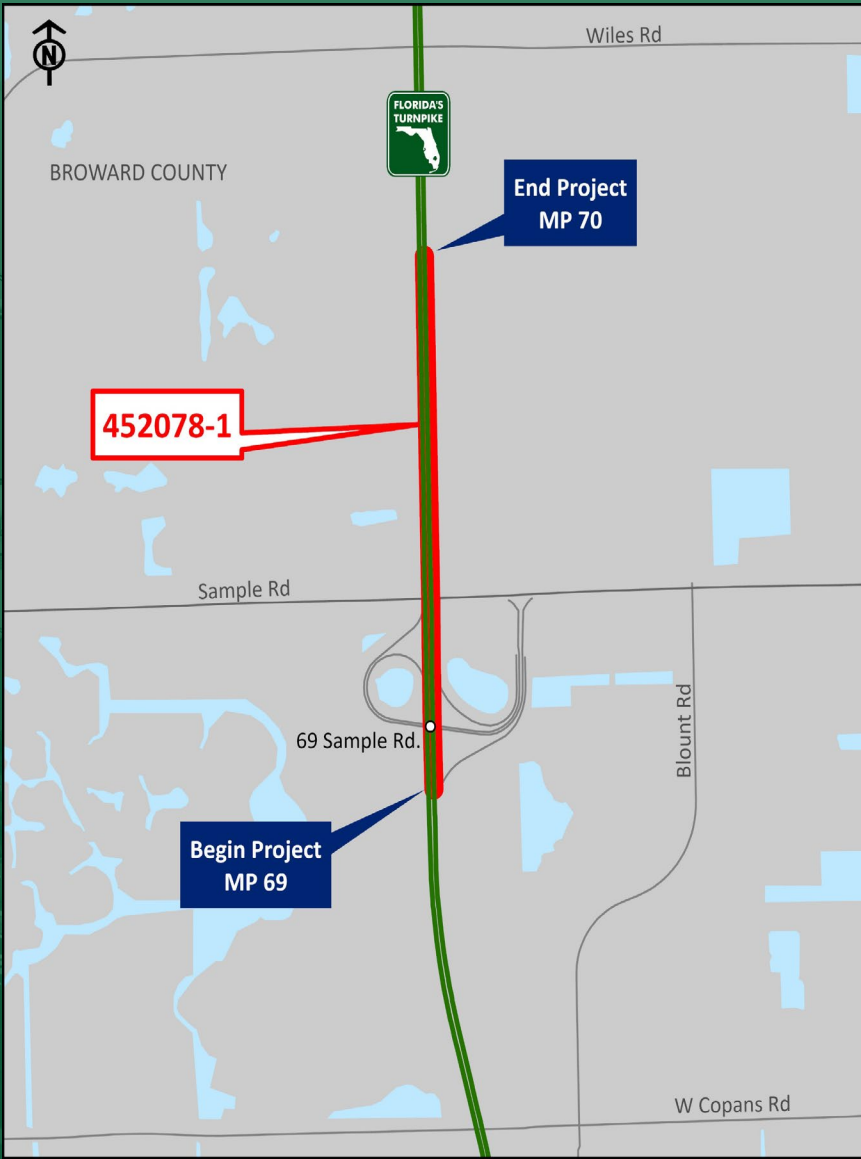

PM (Subject to Change)	Paul Naranjo (407) 264 - 3429
Ad No / FPID(s)	Ad 25808 / 452078-1-32-01
County/Countries	Broward
Anticipated Contract \$	\$1.71
Anticipated Formal Ad	July 2024
Anticipated Contract Execution	January 2025
Anticipated Major/Minor Work Types	Major – 3.3, 4.1.2 Minor – 2.0, 4.1.1, 6.1, 6.2, 6.3.1, 6.3.2, 6.3.3, 7.1, 7.2, 7.3, 8.1, 8.2, 8.3, 8.4, 9.1, 9.2, 9.4.1, 15.0

General Project Description and Key Components
This design project will widen Turnpike Mainline (SR 91) from the North of Sample Rd to Wiles Rd (MP 69-70) in Broward County. Project scope includes shifting mainline centerline west, improving stormwater collection, addition of ponds, provide overhead sign structures, LED lighting and upgrade ITS infrastructure within project limits.

# THOMAS B MANUEL BRIDGE REPLACEMENT (SB ONLY) (MP 131.2)

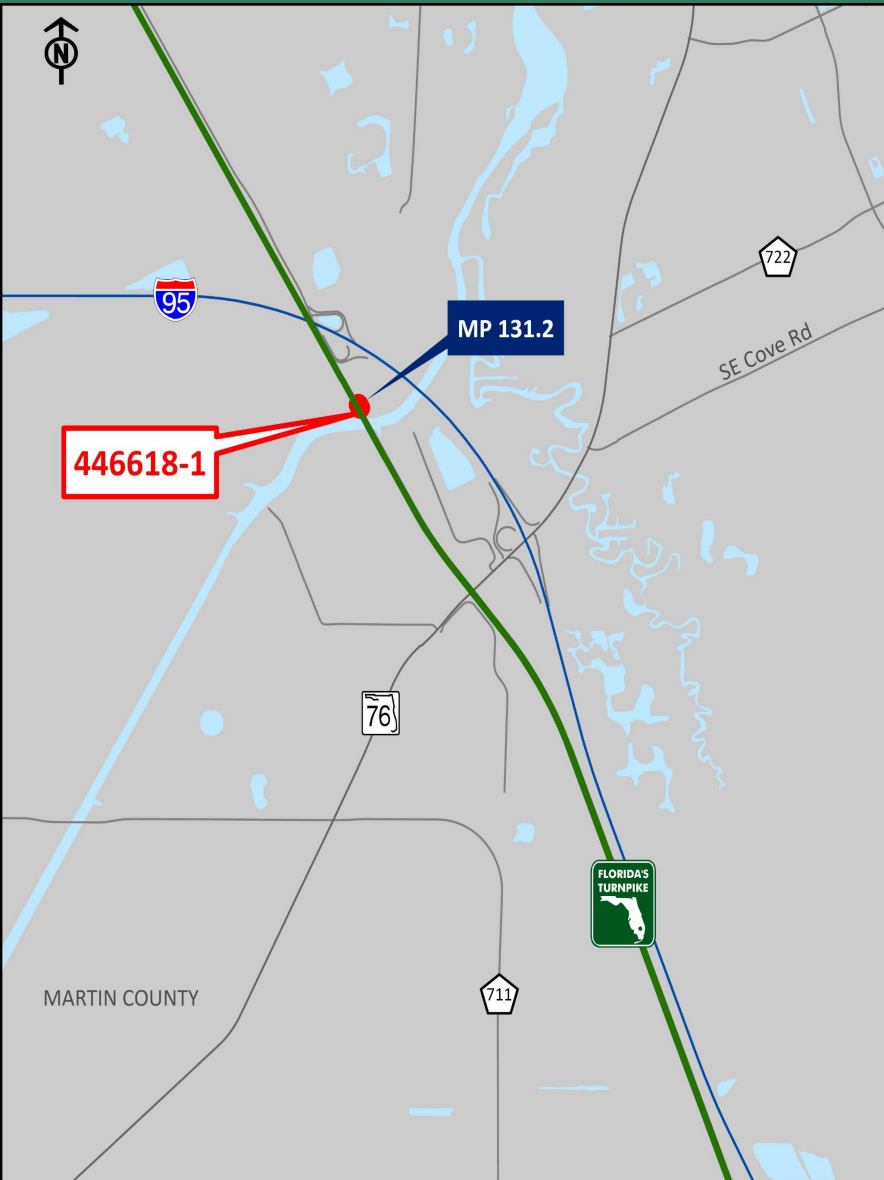

<b>PM (Subject to Change)</b>	<b>Su Hao (407) 264 - 3189</b>
Ad No / FPID(s)	Ad 25812 / 446618-1-32-01
County/Countries	Martin
Anticipated Contract \$	\$3.41
Anticipated Formal Ad	<i>October 2024</i>
Anticipated Contract Execution	<i>May 2025</i>
Anticipated Major/Minor Work Types	Major – 4.2.1 Minor – 2.0, 3.3, 4.1.1, 6.1, 6.3.1, 6.3.2, 6.3.3, 7.1, 7.2, 8.1, 8.2, 9.1, 9.2, 9.4.1, 15.0


<b>General Project Description and Key Components</b>
This design project replaces the southbound Thomas B Manuel Bridge (MP 131.2) in Martin County. A PD&E for this project was performed under FPID 423374-1-22-01, which summarizes the proposed improvements.



# COCONUT CREEK INTERCHANGE MODIFICATIONS (MP 67)

PM (Subject to Change)	Carlos Estrella (407) 264 - 3429
Ad No / FPID(s)	Ad 25813 / 452077-2-32-01
County/Counties	Broward
Anticipated Contract \$	\$12.50
Anticipated Formal Ad	May 2024
Anticipated Contract Execution	November 2024
Anticipated Major/Minor Work Types	Major – 3.3, 4.2.1 Minor – 6.2, 7.1, 7.2, 7.3, 8.1, 8.2, 8.3, 8.4, 9.1, 9.2, 9.4, 14.0, 15.0

General Project Description and Key Components
<p>This project includes final design of proposed modifications to the Coconut Creek Interchange at MP 67 of the Turnpike Mainline (SR91). The improvements include new diamond type SB on and NB off ramps from/to Coconut Creek Parkway, a direct connection for the SB off and NB on ramps to Blount Rd. with a braided ramp and a roundabout. Coconut Creek Parkway and the ramp bridges will be reconstructed to accommodate Turnpike mainline widening. Work includes pavement design, milling and resurfacing, maintenance of traffic, stormwater collection and treatment facilities, bridge structures, tolling, signing and pavement markings, signals, lighting, communications, and right-of-way acquisition. PD&amp;E study documents are available under FPID 442212-1-22-01.</p>

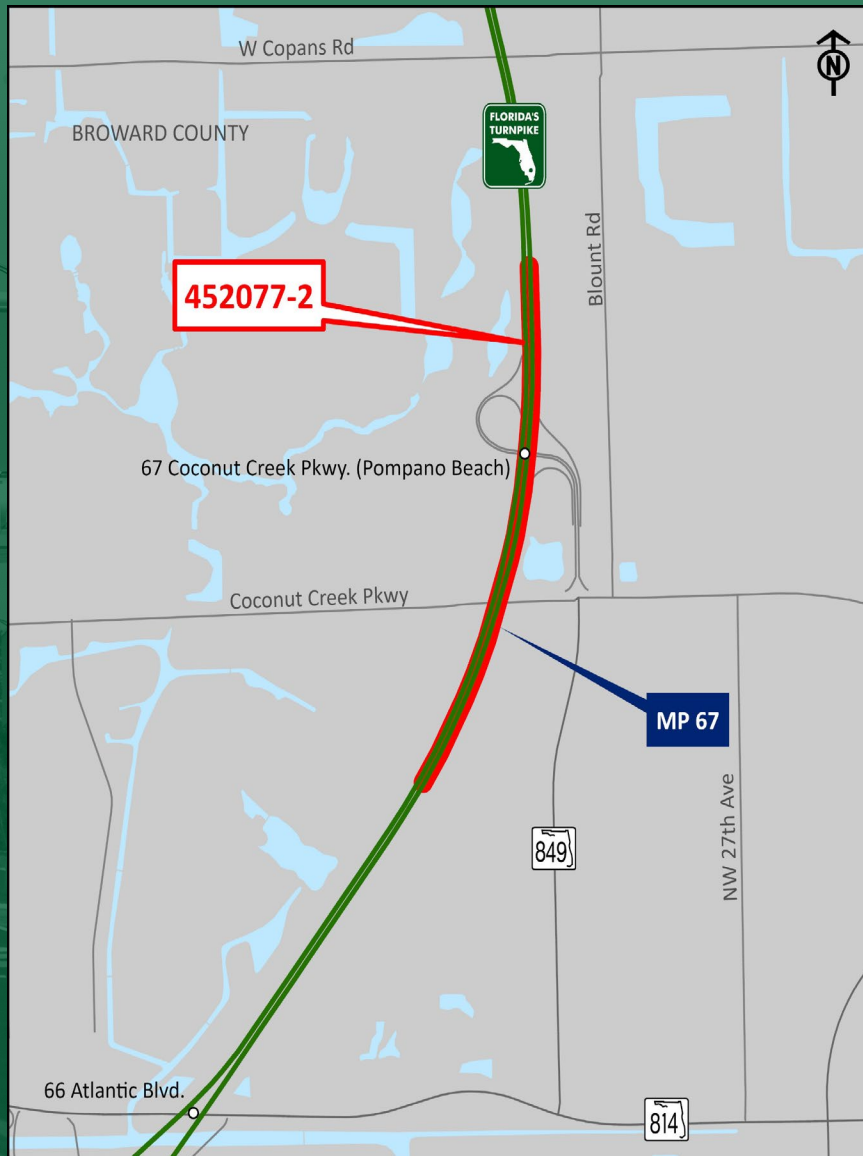

# TSM&O / Operational Improvements & Miscellaneous Projects

Ad No	Formal Ad	FPID	Project	Selection Method
25809	July 2024	452086-2	NORTHERN TURNPIKE CCTV UPGRADES <b>(Small Business Reserved)</b>	ELOR
25810		452086-1	SOUTHERN TURNPIKE CCTV UPGRADES <b>(Small Business Reserved)</b>	ELOR
25811	November 2024	452085-1	IMPROVEMENTS TO BOX CULVERTS TUNPIKEWIDE	ELOR


*Ad No's 25809 and 25810 will be bundled as One (1) Advertisement / two (2) Contracts. TRC will evaluate and score firms based on the lead project (Ad 25809 / 452086-2); however, all competing firms should also familiarize with Ad No 25810 / 452086-1 scope elements. These two contracts will also be reserved for Small Businesses.*

# NORTHERN TURNPIKE CCTV UPGRADES

(Small Business Reserved)

<b>PM</b>	<b>Yang Zhao (407) 264 – 3376</b>
Ad No / FPID(s)	Ad 25809 / 452086-2-32-01
County/Counties	Turnpike
Anticipated Contract \$	\$1.72
Anticipated Formal Ad	July 2024
Anticipated Contract Execution	November 2024
Anticipated Major/Minor Work Types	Major – 6.3.1, 6.3.2, 6.3.3 Minor – 3.3, 4.1.1, 6.1, 6.2, 6.3.4, 7.1, 7.3, 8.1, 8.2, 8.3, 8.4, 9.1, 9.2, 9.4.1, and 14.0

General Project Description and Key Components
Installation of additional CCTVs on the Northern Turnpike system, Canoe Creek Service Plaza, Turkey Lake Service Plaza and Okahumpka Service Plaza to provide better operational awareness during regular congesting and emergency scenarios. The additional cameras will also improve the data collection efforts.

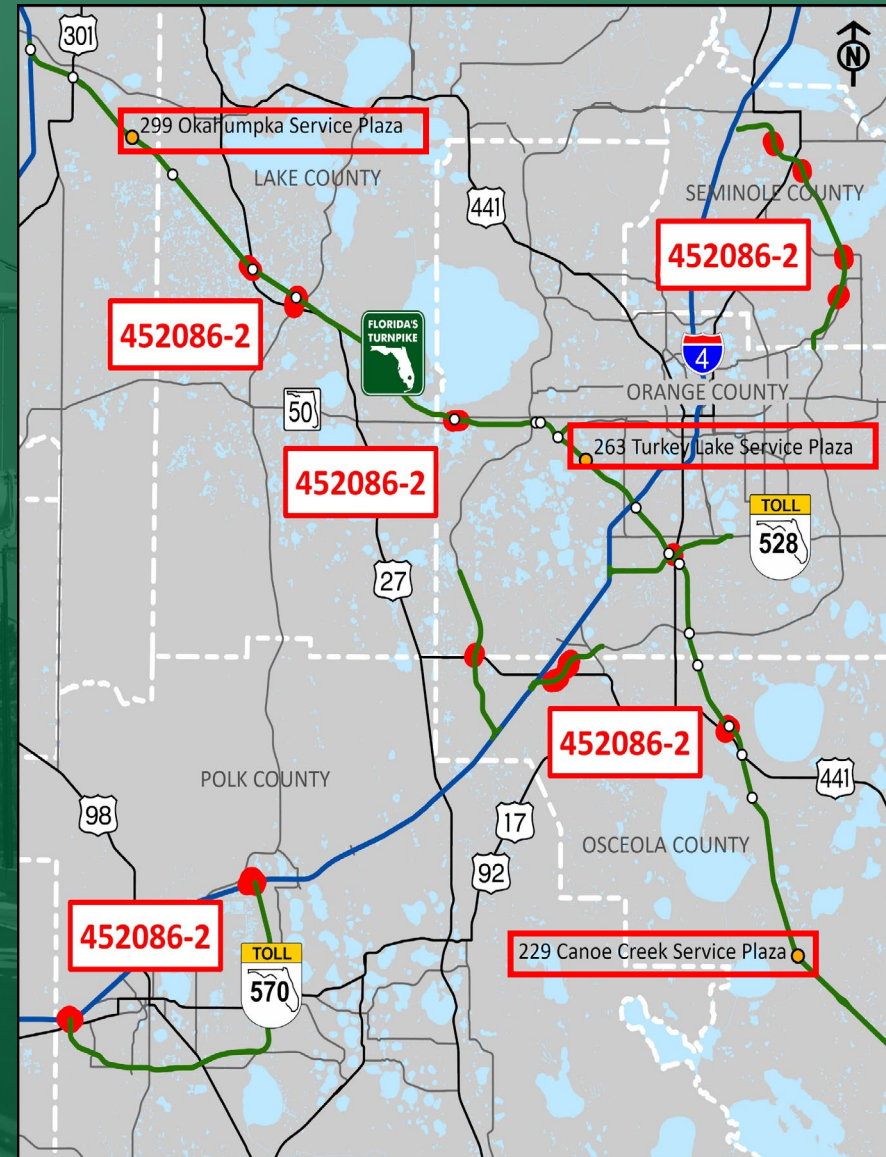





# SOUTHERN TURNPIKE CCTV UPGRADES (Small Business Reserved)

PM	Yang Zhao (407) 264 – 3376
Ad No / FPID(s)	Ad 25810 / 452086-1-32-01
County/Counties	Turnpike
Anticipated Contract \$	\$1.18
Anticipated Formal Ad	July 2024
Anticipated Contract Execution	November 2024
Anticipated Major/Minor Work Types	Major – 6.3.1, 6.3.2, 6.3.3 Minor – 3.3, 4.1.1, 6.1, 6.2, 6.3.4, 7.1, 7.3, 8.1, 8.2, 8.3, 8.4, 9.1, 9.2, 9.4.1, and 14.0

General Project Description and Key Components
Installation of additional CCTVs on the Southern Turnpike system Fort Drum and West Palm Beach Service Plaza to provide better operational awareness during regular congesting and emergency scenarios. The additional cameras will also improve data collection efforts.

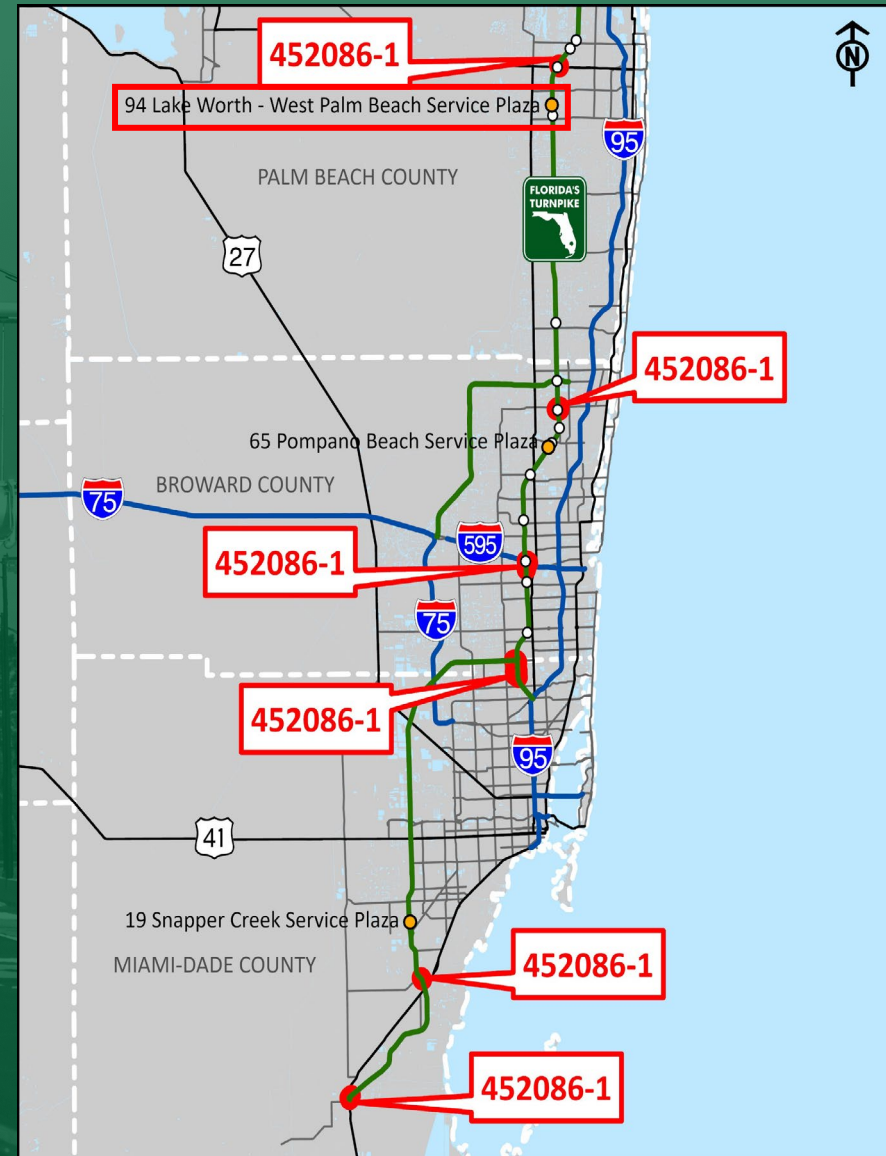

# IMPROVEMENTS TO BOX CULVERTS TURNPIKEWIDE

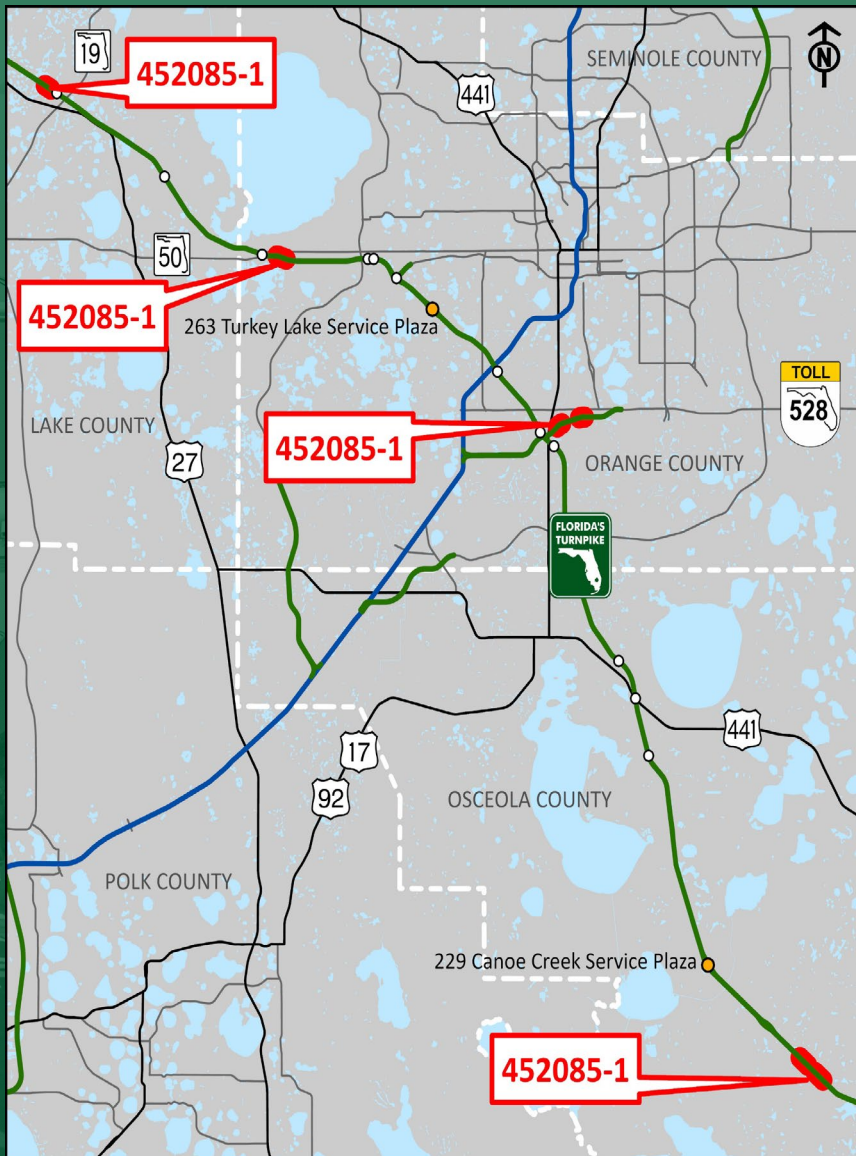


PM	<b>Michael Leo (407) 364 - 3414</b>
Ad No / FPID(s)	Ad no 25811 / 452085-1-32-01
County/Counties	Statewide
Anticipated Contract \$	\$0.25
Anticipated Formal Ad	<i>November 2024</i>
Anticipated Contract Execution	<i>April 2025</i>
Anticipated Major/Minor Work Types	Major – 4.1.2 Minor – 3.1, 8.1, 8.2, 9.1, 9.2

## General Project Description and Key Components

This design project will rehabilitate box culverts with interiors which exhibit loss of the exterior layer of concrete cover which protects internal reinforcement within culvert walls and slabs due to concrete scaling (or abrasion). Work will include removal of unsound concrete followed by restoration. Other work, such as dewatering, and the repair of cracks and spalls will be necessary as part of the preparation for the concrete restoration work. Engineering and evaluation are necessary to develop the appropriate details for the rehabilitation work.



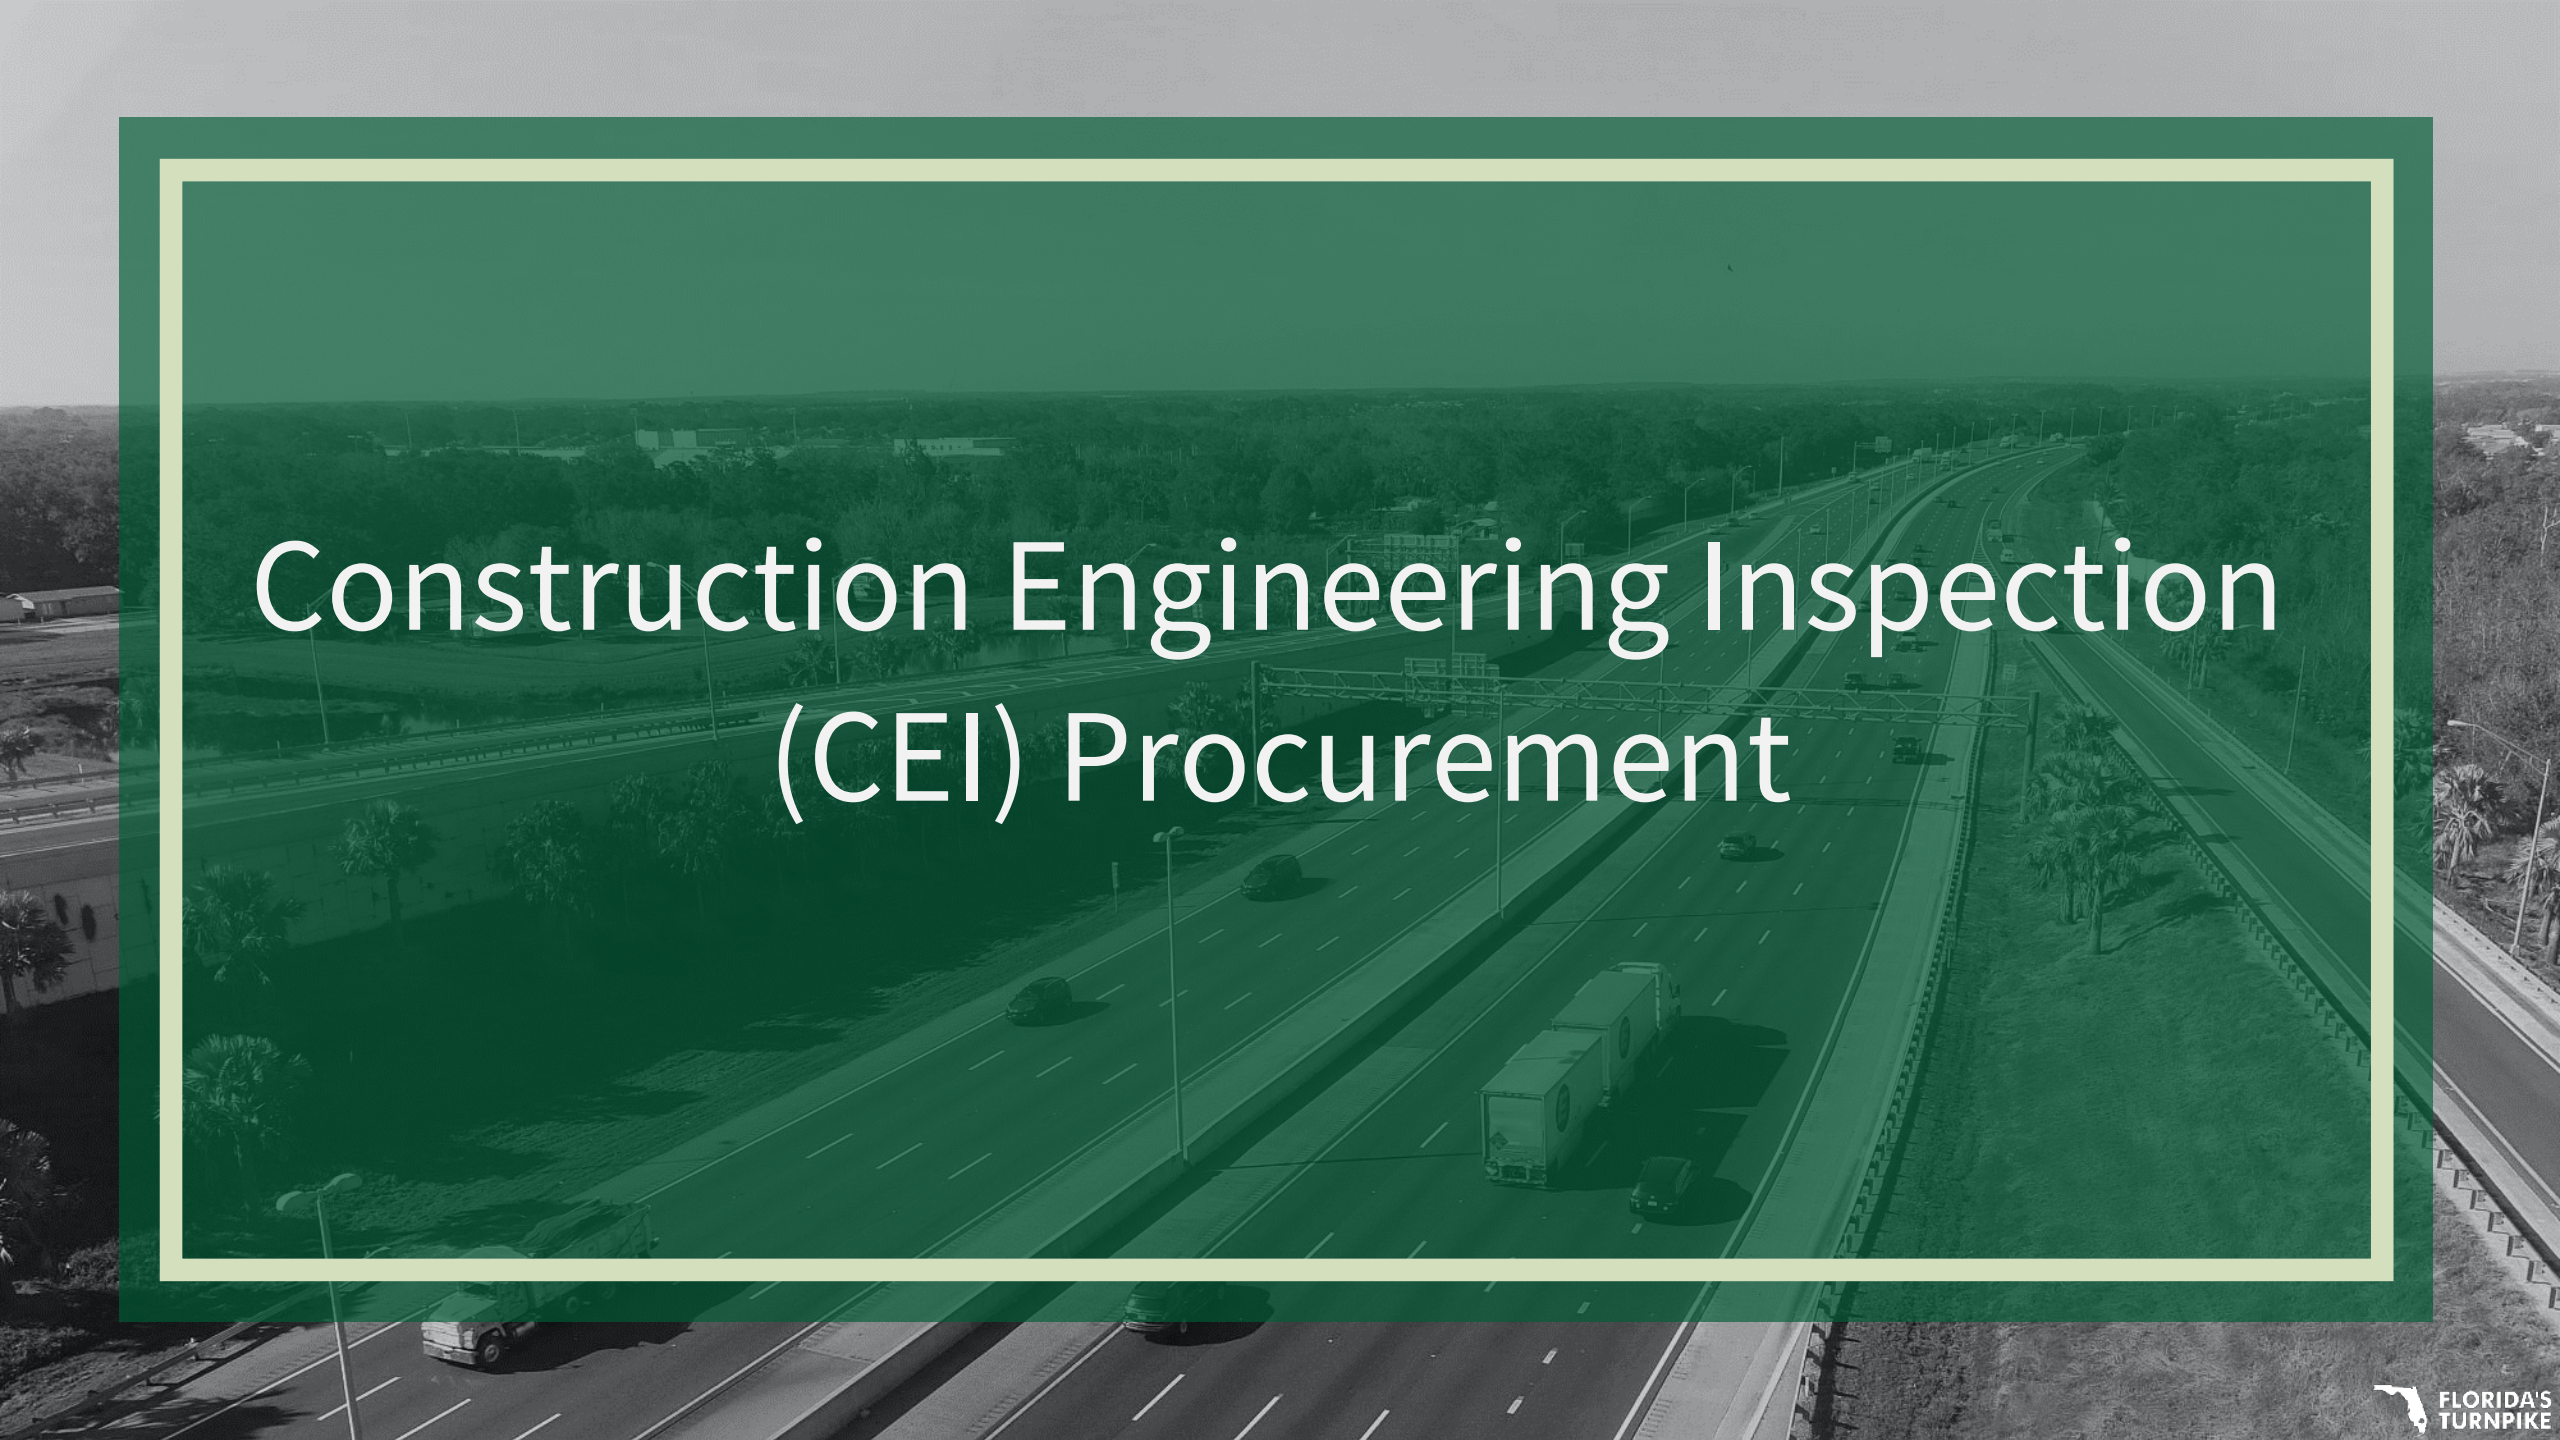

# Construction Engineering Inspection (CEI) Procurement




Ad No	Formal Ad	FPID	Project
TBD 1 Ad / 1 contract	April 2024	437211-1 & 444111-1	HEFT & SURFACE STREET IMPROVEMENTS FROM HAINLIN MILL TO US 1(MP 5-12) WIDEN TPK (SR821) CAMPBELL DR TO TALLAHASSEE RD (MP3-7)(4TO6LNS)
TBD 1 Ad / 1 contract	May 2024	406143-8	WIDEN TPK (SR91) SOUTHERN BLVD TO OKEECHOBEE BLVD (MP 98-101)(4TO8LNS)
TBD 1 Ad / 1 contract	Aug 2024	437155-1	WIDEN SAWGRASS(SR869) SUNRISE BLVD TO OAKLAND PARK(MP0.5-4.1)(6TO10LN)
TBD 1 Ad / 1 contract	TBD	415927-4 & 418214-5 452111-1	TPK (SR91) TSM&O ADD LANES N OF SAWGRASS TO PALM BEACH C/L (MP 71-73) TPK (SR91) TSM&O ADD LANES PALM BEACH C/L TO GLADES RD (MP 73.1-76.4) TPK (SR91) IMPROVEMENTS FOR BRIDGE APPROACHES (MP 79.8)
TBD 1 Ad / 1 contract	June 2024	440897-3 449688-1	CENTRAL POLK PARKWAY - FROM US 17 (SR 35) TO SR 60 & RESURFACE / SAFETY IMPROVEMENTS POLK PARKWAY (SR 570) (MP 8 TO MP 17) POLK COUNTY
TBD 1 Ad / 2 contracts	July 2024	445883-1 & 445884-1 449687-1	RESURFACE / SAFETY IMPROVEMENTS SOUTHERN CONNECTOR EXT. (SR 417) IN OSCEOLA COUNTY (MP 0-4) AND ORANGE COUNTY (MP 4-6) RESURFACE / SAFETY IMPROVEMENTS SEMINOLE EXPRESSWAY, MP 50 – 55
TBD 1 Ad / 1 contract	Dec 2024	452116-1	TSM&O WESTERN BELTWAY (SR429)/US192 INTERCHANGE SB OFF-RAMP (MP5.5)

# CEI (Cont.)

Ad No	Formal Ad	FPID	Project
TBD 1 Ad / 1 contract	Dec 2024	442764-2 447702-1	SUNCOAST II-PHASE 3A (SR589)-CR 486 TO CR 495 & RESURFACE / SAFETY IMPROVEMENTS SUNCOAST (SR 589) IN PASCO COUNTY, MP 17.5-28.5
TBD 1 Ad / 1 contract	January 2025	448524-1	BRIDGE REPLACEMENT - 890083 (SR 91) (MP 138) MARTIN COUNTY
TBD 1 Ad / 1 contract	January 2025	452080-1 452082-1	REPLACE HEMPEL AVENUE OVERPASS IN ORANGE COUNTY (#750387) TSM&O IMPROVEMENTS TO SR 50 OCOEE IN ORANGE COUNTY (MP 267B)
TBD 1 Ad / 1 contract	January 2025	452228-1 434968-4 434968-5	HPS TO LED LIGHTING CONVERSION TURNPIKEWIDE - PHASE I WRONG WAY VEHICLE DETECTION – SOUTH FLORIDA WRONG WAY VEHICLE DETECTION – CENTRAL FLORIDA

*Schedules are under development / Dates subject to change*

# HEFT & SURFACE STREET IMPROVEMENTS FROM HAINLIN MILL TO US 1(MP 5-12) & WIDEN TPK (SR821) CAMPBELL DR TO TALLAHASSEE RD (MP3-7)(4TO6LNS)

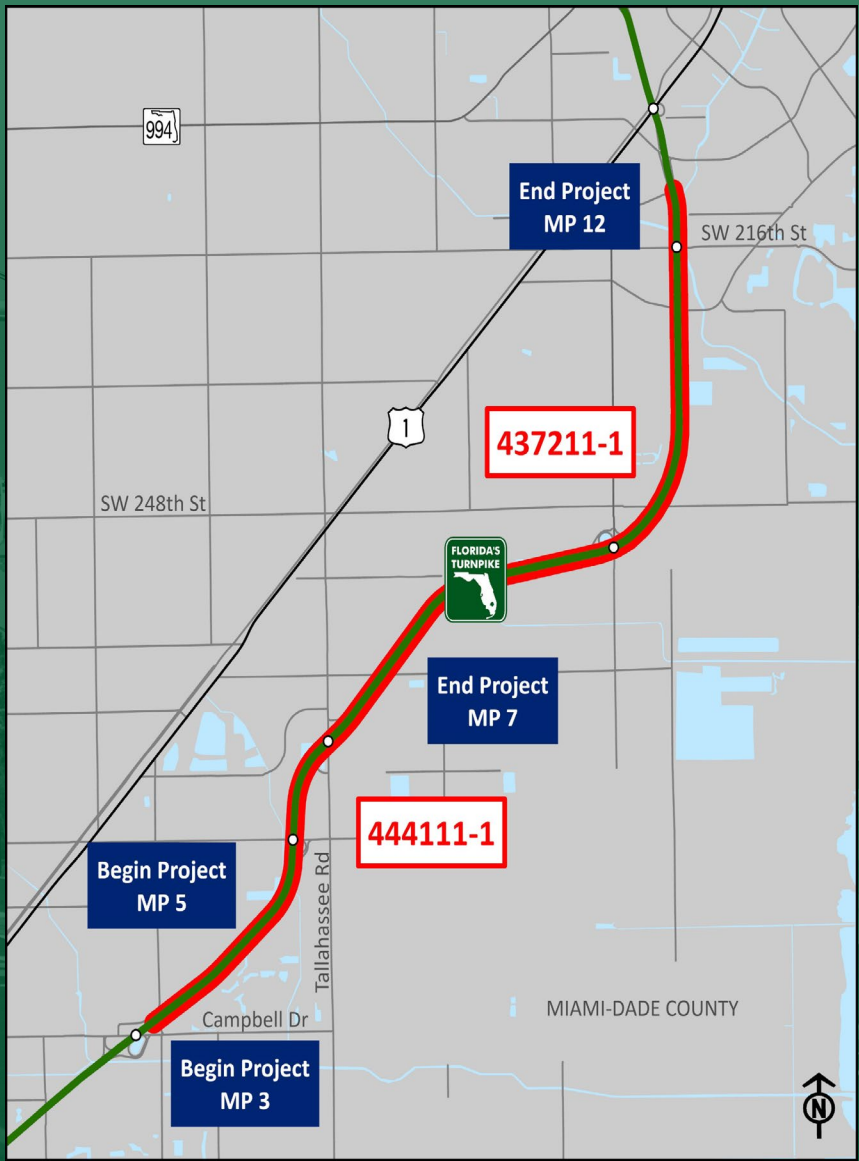

PM	Pacifico Castillo (954) 934-1118
FPID(s)	437211-1-62-01 & 444111-1-62-01
County/Counties	Miami Dade
Anticipated Contract \$	437211-1-62-01 - \$5.16 444111-1-62-01 - \$11.13
Anticipated Formal Ad	April 2024
Anticipated Contract Execution	August 2024
Anticipated Major/Minor Work Types	10.1

## General Project Description and Key Components

**437211-1:** The proposed improvements for this project are to improve safety and enhance overall traffic operations on this segment of the Turnpike Mainline (SR821) and side streets, as well as bridge rehabilitation within the project limits. This work includes widening of the SB Frontage Road from two to three lanes between Hainlin Mill Rd. and Caribbean Blvd. and the addition of a ramp lane. The project also includes milling and resurfacing the NB direction of the Turnpike Mainline (SR 821) from Cutler Ridge Blvd. to US-1, along with portions of side streets (Hainlin Mill Rd., Caribbean Blvd., Cutler Ridge Blvd. and Eureka Dr.), frontage roads (NB Frontage Road and SB Frontage Road), and ramps (Ramps A, B, C, E, F, H) adjacent to the Turnpike Mainline (SR 821). Signal improvements at side street intersections, LED lighting and ITS upgrades are also proposed.

**444111-1:** The project widens Florida’s Turnpike Mainline (SR 821) from Campbell Drive/SW 132nd Street to Tallahassee Road/SW 137th Avenue in Miami-Dade County from four to six lanes. Work includes repaving, bridge improvements, signal improvements, signing and pavement marking improvements, and noise walls in qualifying areas. Interchange improvements are proposed at the Biscayne Drive interchange and Tallahassee Road interchange. A new northbound entrance ramp from Tallahassee Road to Turnpike Mainline will also be constructed with this project.


*Dates are subject to change*



# WIDEN TPK (SR91) SOUTHERN BLVD TO OKEECHOBEE BLVD (MP 98-101)(4TO8LNS)

<b>PM</b>	<b>Pablo Rodriguez (954) 934-1296</b>
FPID(s)	406143-8-62-01
County/Counties	Palm Beach
Anticipated Contract \$	\$19.84
Anticipated Formal Ad	May 2024
Anticipated Contract Execution	September 2024
Anticipated Major/Minor Work Types	10.1


General Project Description and Key Components
<p>This project will widen Florida's Turnpike Mainline (SR 91) from north of Southern Boulevard (SR 80 / US 98) to north of Okeechobee Boulevard (SR 704) in Palm Beach County from 4 to 8 lanes. Project scope includes pavement widening, reconstruction, milling and resurfacing, bridge improvements and replacements, utility adjustments, drainage improvements, and noise walls. Interchange improvements are proposed at the Jog Road interchange and Okeechobee Boulevard (SR 704) interchange.</p>

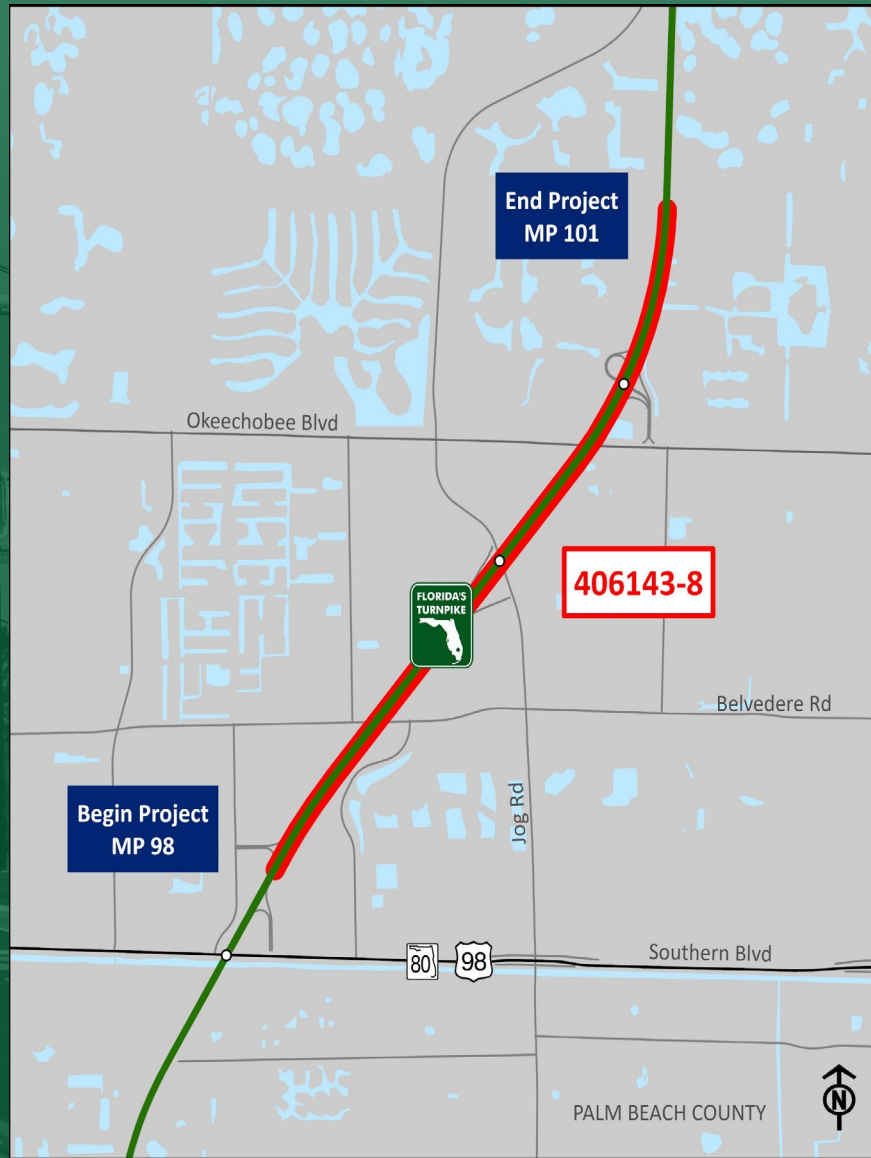

# WIDEN SAWGRASS(SR869) SUNRISE BLVD TO OAKLAND PARK(MP0.5-4.1)(6TO10LN)

PM	Jaime Gomez (954) 934-1178
FPID(s)	437155-1-62-01
County/Counties	Broward
Anticipated Contract \$	\$32.26
Anticipated Formal Ad	TBD
Anticipated Contract Execution	TBD
Anticipated Major/Minor Work Types	10.1

General Project Description and Key Components
<p>This project will widen the Sawgrass Expressway (SR 869) from Sunrise Blvd to Oakland Park Blvd (MP 0.5 to 4.1) in Broward County from 6 to 10 lanes. Construction will also include a new southbound connector-distributor roadway, interchange improvements at Sunrise Blvd, Pat Salerno Blvd, and Oakland Park Blvd, and feature an Electronic Tolling Collection (ETC) system. Roadside improvements also include barrier walls, guardrail, noise walls, drainage, signing &amp; pavement markings, signalization, lighting, and ITS improvements throughout the limits of construction.</p>

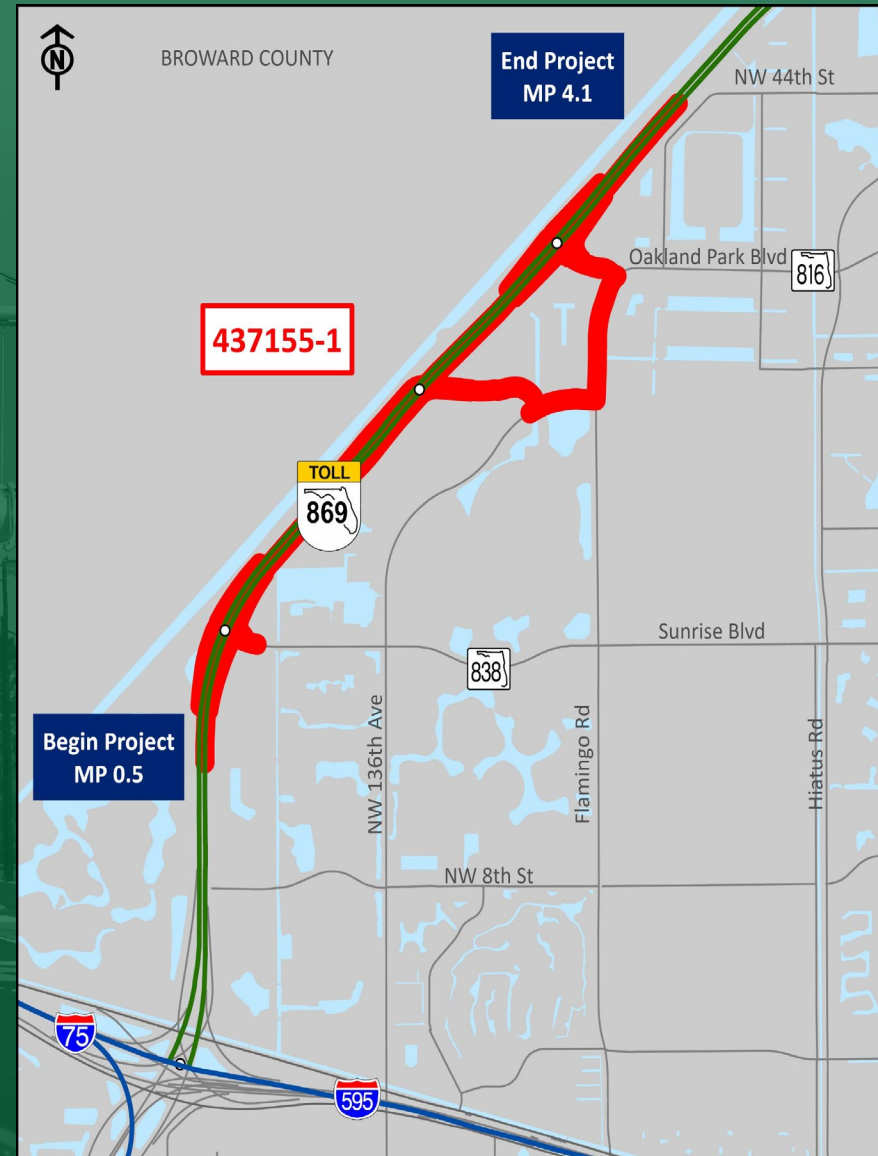

## TPK (SR91) TSM&O ADD LANES N OF SAWGRASS TO PALM BEACH C/L (MP 71-73), TPK (SR91) TSM&O ADD LANES PALM BEACH C/L TO GLADES RD (MP 73.1-76.4) & TPK (SR91) IMPROVEMENTS FOR BRIDGE APPROACHES (MP 79.8)

PM	Pacifico Castillo (954) 934-1118
FPID(s)	415927-4-62-01, 418214-5-62-01 & 452111-1-62-01
County/Counties	Broward & Palm Beach
Anticipated Contract \$	415927-4-62-01 - \$4.18 418214-5-62-01 - \$7.73 452111-1-62-01 - \$0.39
Anticipated Formal Ad	TBD
Anticipated Contract Execution	TBD
Anticipated Major/Minor Work Types	10.1


### General Project Description and Key Components

**415927-4:** This project is to improve operations by adding northbound and southbound through travel lanes to Florida's Turnpike Mainline/SR 91 from north of Sawgrass Expressway /SR 869 to the Palm Beach County line. This is a Transportation Systems Management and Operations (TSM&O) project that converts a portion of the shoulder along with minor widening to add lanes in each direction to a two-mile segment of Florida's Turnpike Mainline / SR 91. The project will increase the number of lanes from six to eight and will include one additional lane in each direction.

**418214-5:** This project is to improve operations by adding northbound and southbound travel lanes to Florida's Turnpike Mainline/SR 91 from the Broward/Palm Beach County line to north of Glades Road/SR 808. This is a Transportation Systems Management and Operations (TSM&O) Project that converts a portion of the shoulder along with minor widening to add a lane in each direction to a three-mile segment of Florida's Turnpike Mainline / SR 91. The project will increase the number of lanes from six to eight.

**452111-1:** This project will repair/replace the approach slabs of bridge No. 930215, Turnpike Mainline (SR 91) over Lake Worth Drainage District (LWDD) Lateral Canal L-38.

*Dates are subject to change*

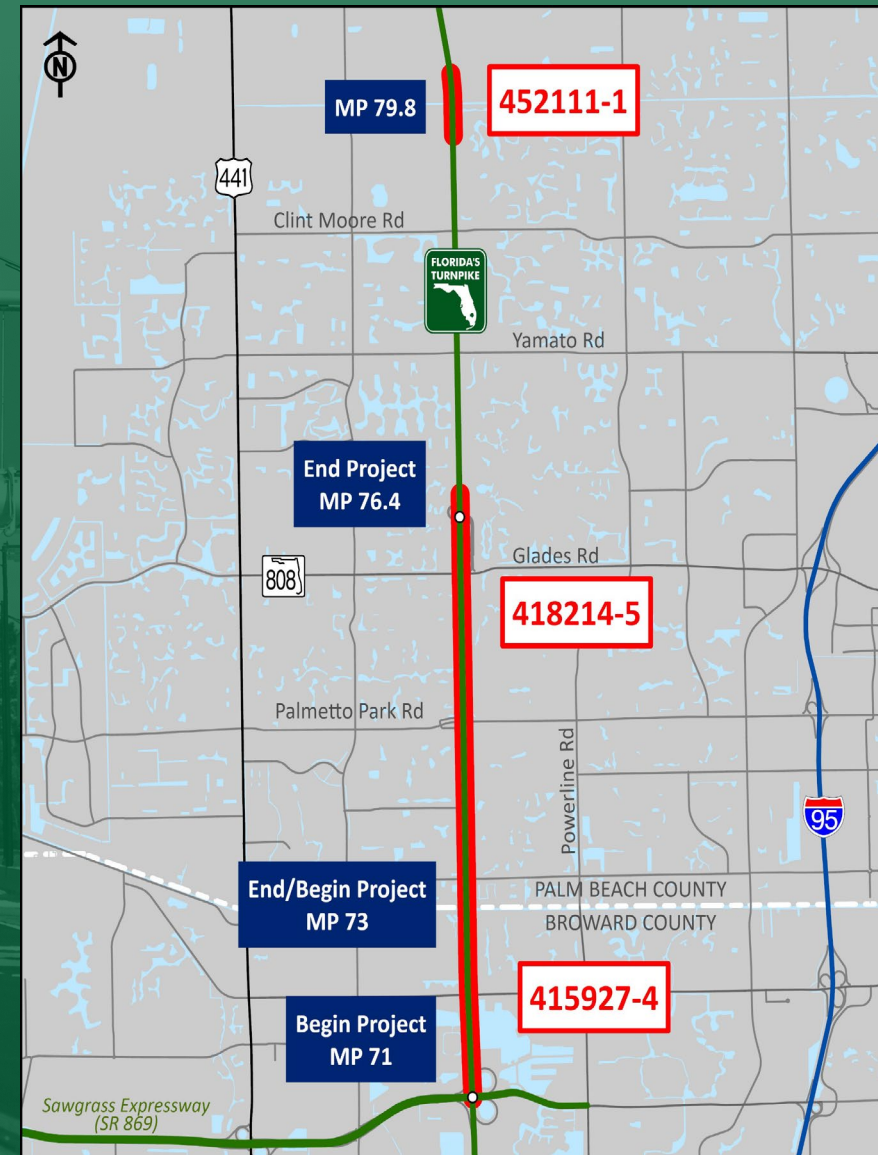





# CENTRAL POLK PARKWAY - FROM US 17 (SR 35) TO SR 60 & RESURFACE POLK PARKWAY (SR 570) (MP 8 TO MP 17) POLK COUNTY

PM	Virgil Rook (407) 264-3841 Yared Worku (352) 870-9632
FPID(s)	440897-3-62-01 & 449688-1-62-01
County/Counties	Polk
Anticipated Contract \$	440897-3-62-01 - \$12.44 449688-1-62-01 - \$1.90
Anticipated Formal Ad	June 2024
Anticipated Contract Execution	October 2024
Anticipated Major/Minor Work Types	10.1

General Project Description and Key Components
<p><b>440897-3:</b> The Central Polk Parkway (CPP) is a new limited access (LA) four-lane tolled roadway that will extend approximately 2.5 miles from US 17 (SR 35) to SR 60, in Polk County, Florida. The proposed typical section will provide four, 12-foot-wide travel lanes, two in each direction, with 8-foot-wide shoulders on the inside, 12-foot-wide shoulders on the outside, and a grassed median. The project will also include a 12-ft wide shared use path on the west side of the CPP alignment.</p> <p><b>449688-1:</b> This project will mill, resurface, and provide roadside safety improvements of the Polk Parkway (SR 570) from north of the West Toll Plaza to north of the bridge over the CSX railroad (MP 8.2 to 17) in Polk County. This includes interchanges with Lakeland Highland Rd and US 98. The ERCAR is prepared under FPID 449688-2-22-01, summarizing existing conditions and recommended improvements.</p>

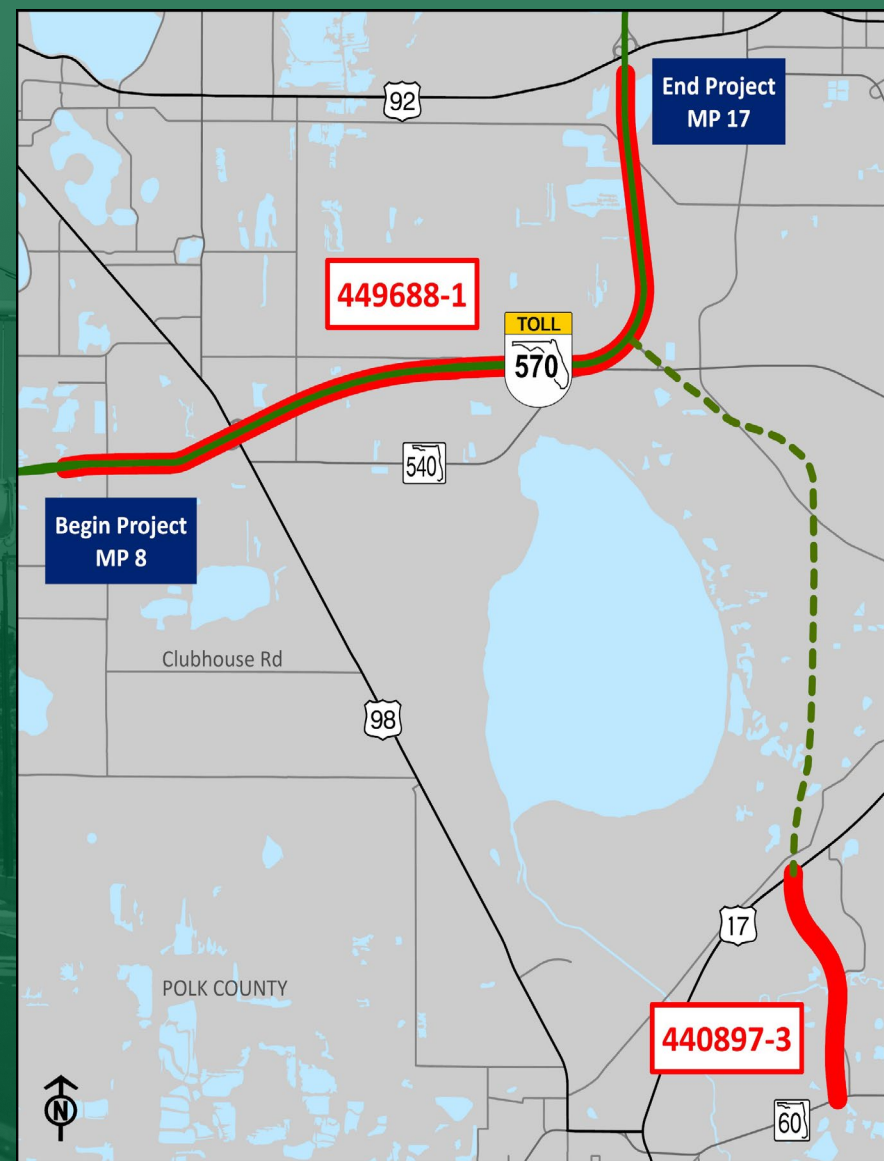

# RESURFACE SOUTHERN CONNECTOR EXT. (SR 417) IN OSCEOLA AND ORANGE COUNTY, MP 0-4 and 4-6

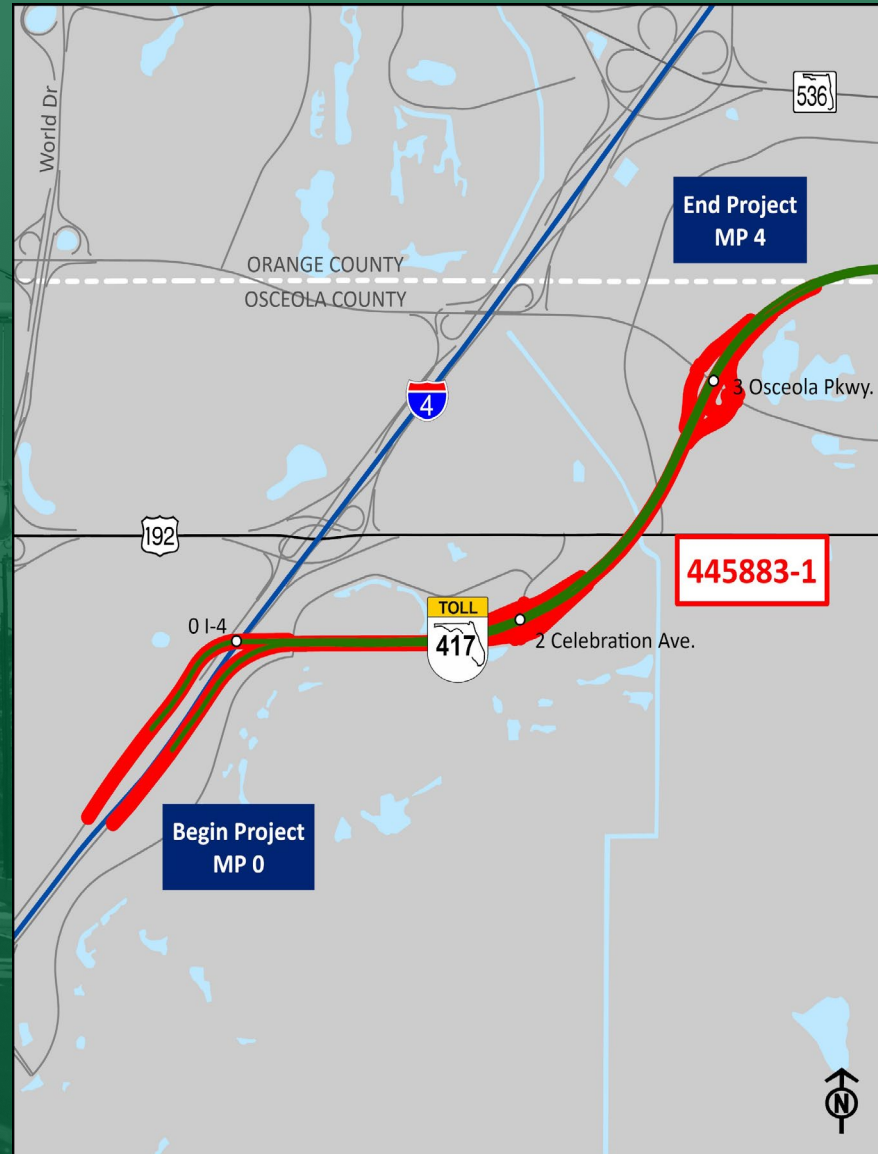


PM	Yared Worku (352) 870-9632
FPID(s)	445883-1-62-01 & 445884-1-62-01
County/Counties	Osceola and Orange
Anticipated Contract \$	\$1.63
Anticipated Formal Ad	July 2024
Anticipated Contract Execution	November 2024
Anticipated Major/Minor Work Types	10.1

## General Project Description and Key Components

These projects are for the milling, resurfacing, and safety improvements of the 417 Southern Connector from milepost 0.0 to 6.0. Improvements include cross-slope correction, signal improvements at Osceola Parkway, guardrail, drainage, and structural improvements such as culvert repairs and bridge crack and spall repairs.

# RESURFACE SEMINOLE EXPRESSWAY (SR 417) (MP 50 TO MP 55) SEMINOLE CNTY

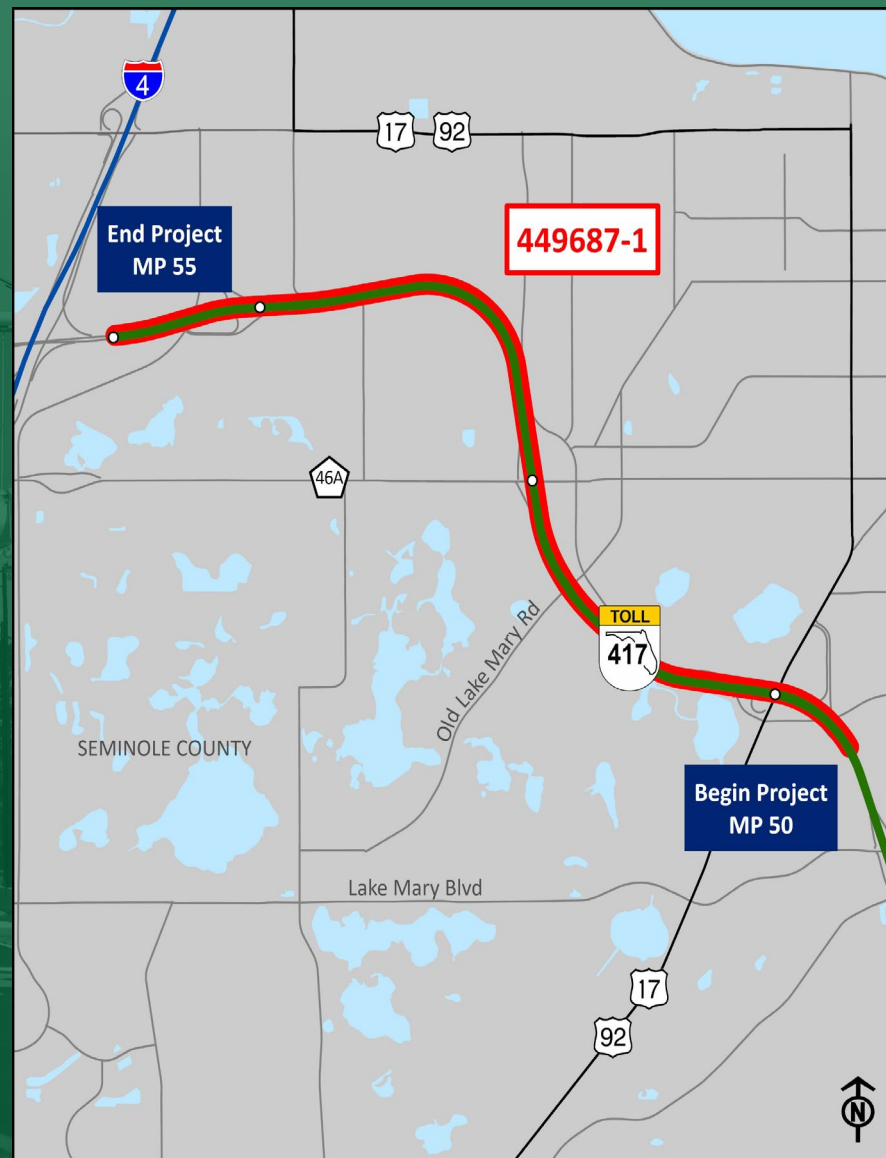


<b>PM</b>	<b>Adam Massimo (484) 883-1315</b>
FPID(s)	449687-1-62-01
County/Counties	Seminole
Anticipated Contract \$	\$1.86
Anticipated Formal Ad	July 2024
Anticipated Contract Execution	December 2024
Anticipated Major/Minor Work Types	10.1

**General Project Description and Key Components**

This project will include milling and resurfacing of the existing Seminole Expressway (SR 417) mainline and ramp travel lanes, inside shoulders, and outside shoulders from just south of Airport Blvd to the north limits of the existing bridge over Towne Center Blvd (MP 50-55) in Seminole County. Project scope includes guardrail repair, cross slope correction, correction of shoulder drop-offs and vertical deflections at bridge approach slabs, replace wrong-way vehicle detection systems, and lighting improvements.



# TSM&O WESTERN BELTWAY (SR429)/US192 INTERCHANGE SB OFF-RAMP (MP5.5)

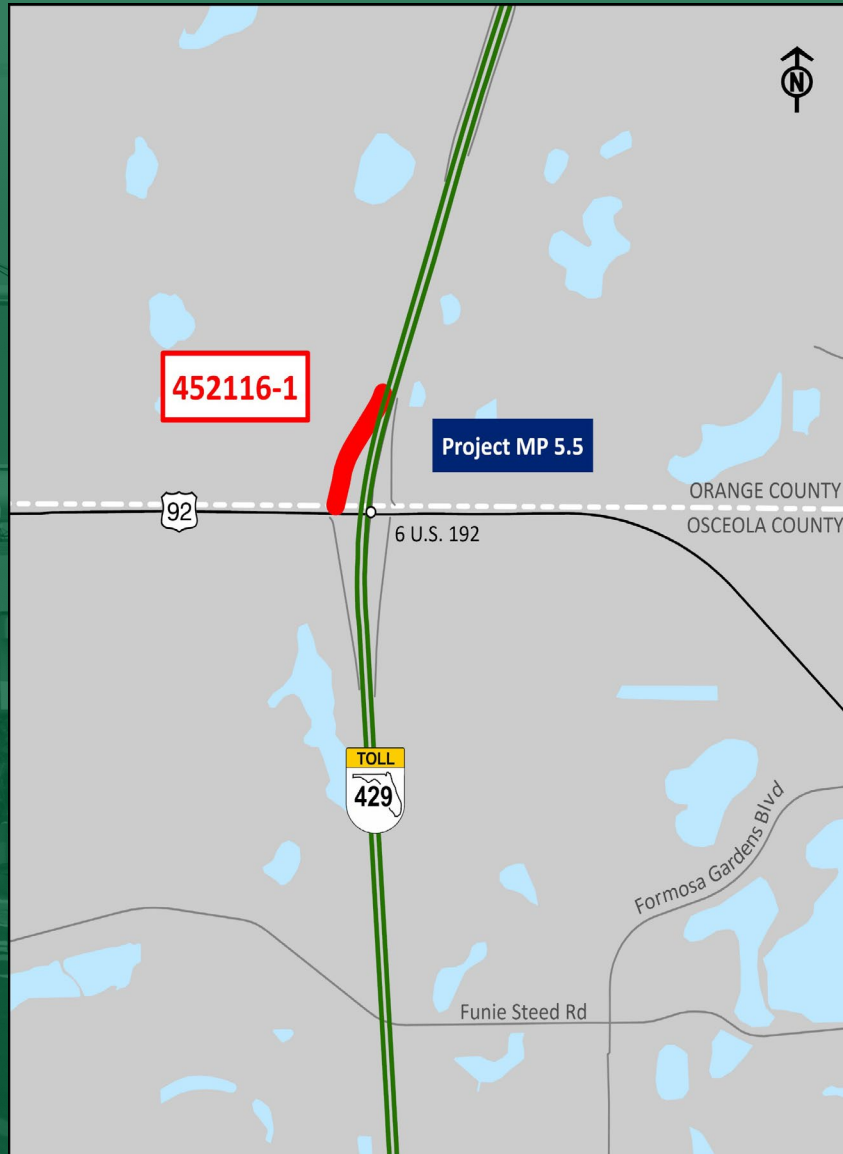

PM	Virgil Rook (407) 264-3841
FPID(s)	452116-1-62-01
County/Counties	ORANGE
Anticipated Contract \$	\$2.49
Anticipated Formal Ad	December 2024
Anticipated Contract Execution	February 2025
Anticipated Major/Minor Work Types	10.1


## General Project Description and Key Components

This project includes improvements to the southbound Western Beltway (SR 429) exit ramp to US 192 in Orange County. The southbound US 192 off-ramp will be modified so that all traffic accessing US 192 will exit SR 429 at the existing cash toll plaza exit. The existing ramp will be widened and realigned to connect to the existing toll plaza and the intersection at US 192 will be improved. The project also includes improvements to stormwater facilities, roadway lighting, signalization, ITS, signage and retaining walls.


# SUNCOAST II-PHASE 3A (SR589)-CR 486 TO CR 495 & RESURFACE SUNCOAST (SR 589) IN PASCO COUNTY, MP 17.5 – 28.5

<b>PM</b>	<b>Adam Massimo (484) 883-1315</b>
FPID(s)	442764-2-62-01 & 447702-1-62-01
County/Counties	Citrus & Pasco
Anticipated Contract \$	442764-2 - \$23.91 447702-1 - \$2.62
Anticipated Formal Ad	<i>December 2024</i>
Anticipated Contract Execution	<i>February 2025</i>
Anticipated Major/Minor Work Types	10.1

General Project Description and Key Components
<p><b>442764-2:</b> The project constructs a section of Suncoast Parkway 2/ SR 589 from CR 486 to CR 495. The proposed 6-mile roadway will be a four-lane, divided, limited-access facility that will feature an Electronic Tolling Collection (ETC) system. The project also includes extending the Suncoast trail from CR 486 to CR 495. Project will include the completion of a full interchange at CR 486, the construction of a new partial interchange at CR 495 and associated elements such as drainage, lighting, signage, signalization and guardrails.</p> <p><b>447702-1:</b> This project will mill, resurface, and provide roadside safety improvements of the Suncoast Parkway (SR 589) from south of SR 54 to SR 52 (MP 28.5) in Pasco County. This includes interchanges with SR 54 and SR 52. An ERCAR is prepared under FPID 447702-2-22-01, summarizing existing conditions and recommended improvements.</p>

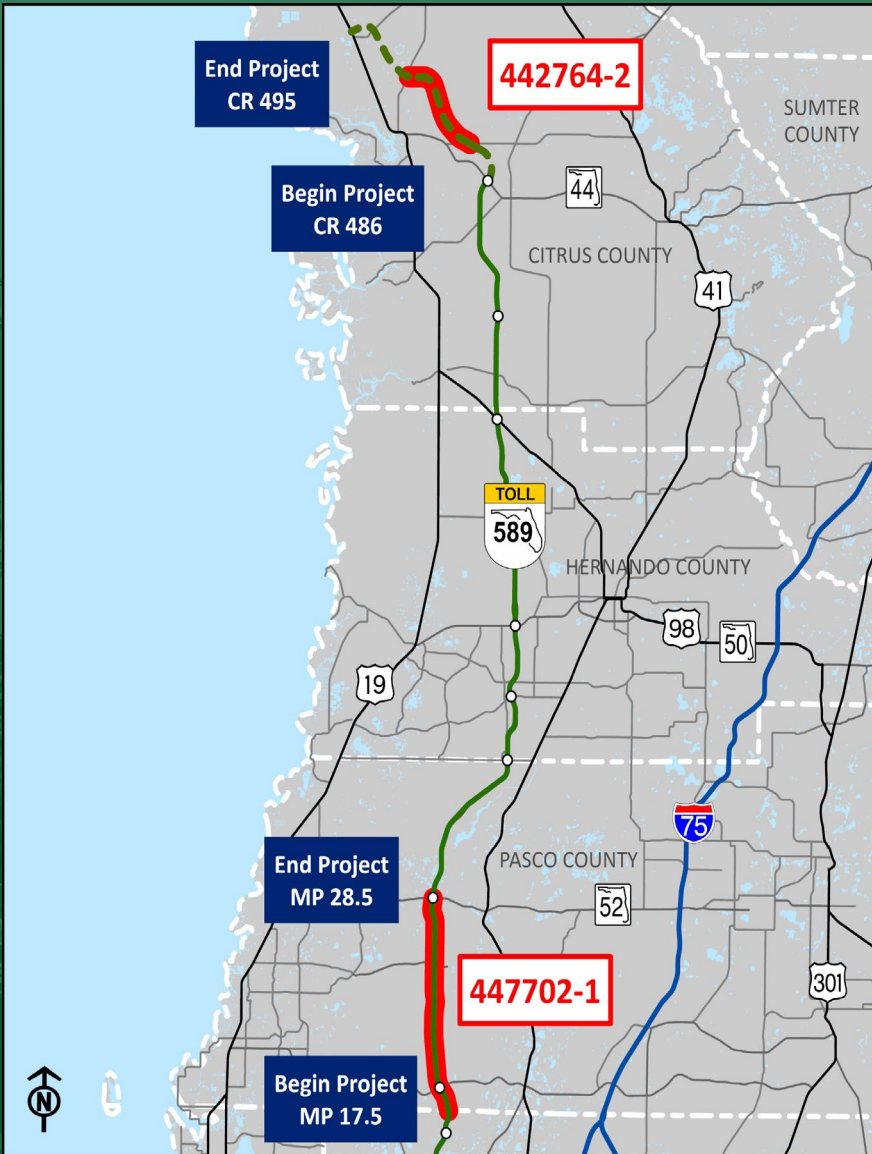

# BRIDGE REPLACEMENT - 890083 (SR 91) (MP 138) MARTIN COUNTY

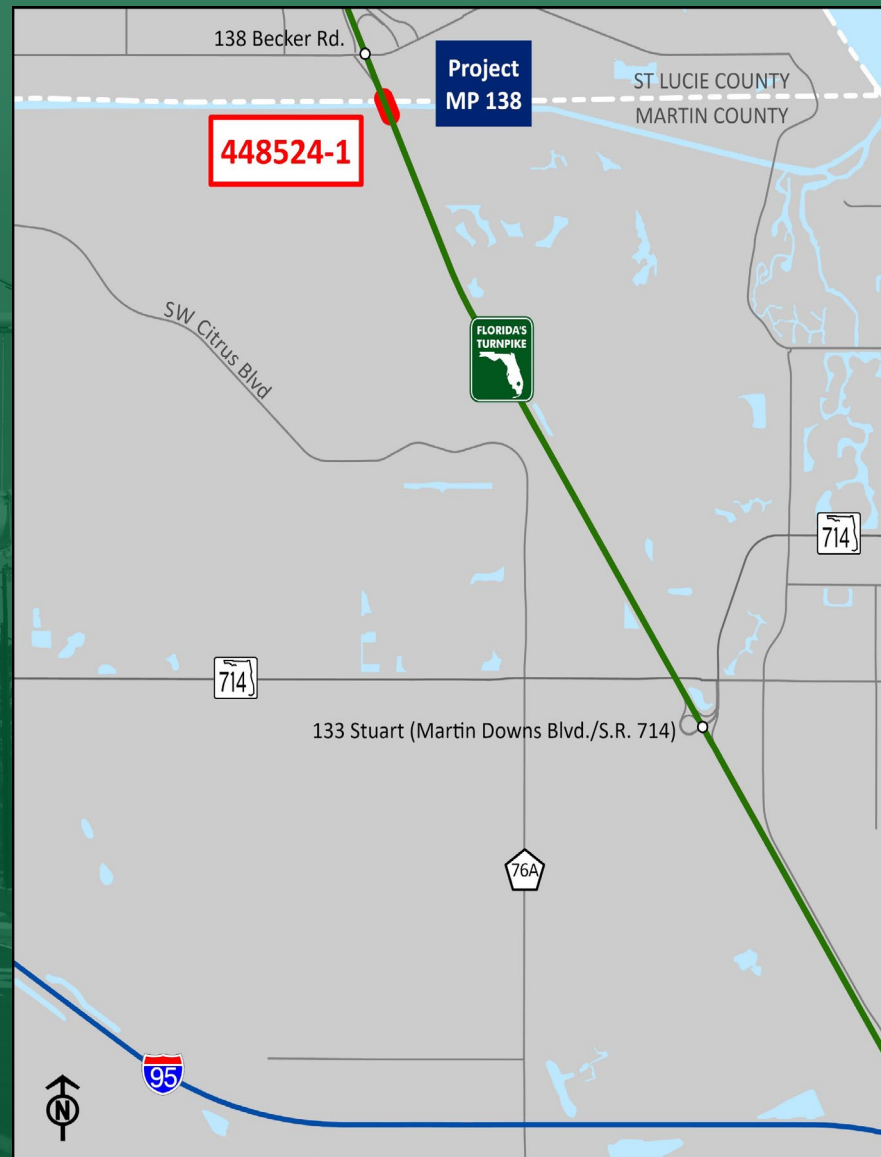

PM	Pablo Rodriguez (954) 934-1296
FPID(s)	448524-1-62-01
County/Counties	Martin
Anticipated Contract \$	\$4.94
Anticipated Formal Ad	January 2025
Anticipated Contract Execution	March 2025
Anticipated Major/Minor Work Types	10.1

## General Project Description and Key Components

This project includes the replacement of the SR-91 over the C-23 Canal Bridge (#890083) in Martin County. The proposed bridge will accommodate the future widening to an 8-lane section as proposed in PD&E project FPID 423374-1. The Turnpike Mainline (SR91) and southbound on-ramp from Becker Road will be realigned to match the new bridge location. The project also includes improvements to stormwater facilities, roadway lighting ITS and signage.




# REPLACE HEMPEL AVENUE OVERPASS IN ORANGE COUNTY (#750387) & TSM&O IMPROVEMENTS TO SR 50 OCOEE IN ORANGE COUNTY (MP 267B)

PM	Virgil Rook (407) 264-3841
FPID(s)	452080-1-62-01 & 452082-1-62-01
County/Counties	Orange
Anticipated Contract \$	452080-1 - \$1.85 452082-1 - \$0.46
Anticipated Formal Ad	January 2025
Anticipated Contract Execution	March 2025
Anticipated Major/Minor Work Types	10.1


## General Project Description and Key Components

**452080-1:** This project includes the replacement of the Hempel Avenue Bridge (#750387) over SR 408 in Orange County. The new bridge will accommodate both the existing and future SR 408 typical sections as proposed in PD&E project 444007-1. Hempel Avenue will be realigned to the east to facilitate phased construction to maintain bi-directional travel and one sidewalk on Hempel Avenue during construction. The project also includes improvements to stormwater facilities, under deck and roadway lighting and ITS.

**452082-1:** This project includes improvements to the Ocoee Connector Interchange with SR 50 in Orange County. This will include the addition of a right lane on the outside of SR 50 eastbound to accommodate right in/right out access at Marshall Farms Road and the accommodation of the Turnpike exit ramp merge. A wall to retain the southern end bent spill slope under Bridge No. 750285 to accommodate the added lane on SR 50 will be constructed. The project also includes improvements to stormwater facilities, roadway lighting and signalization.

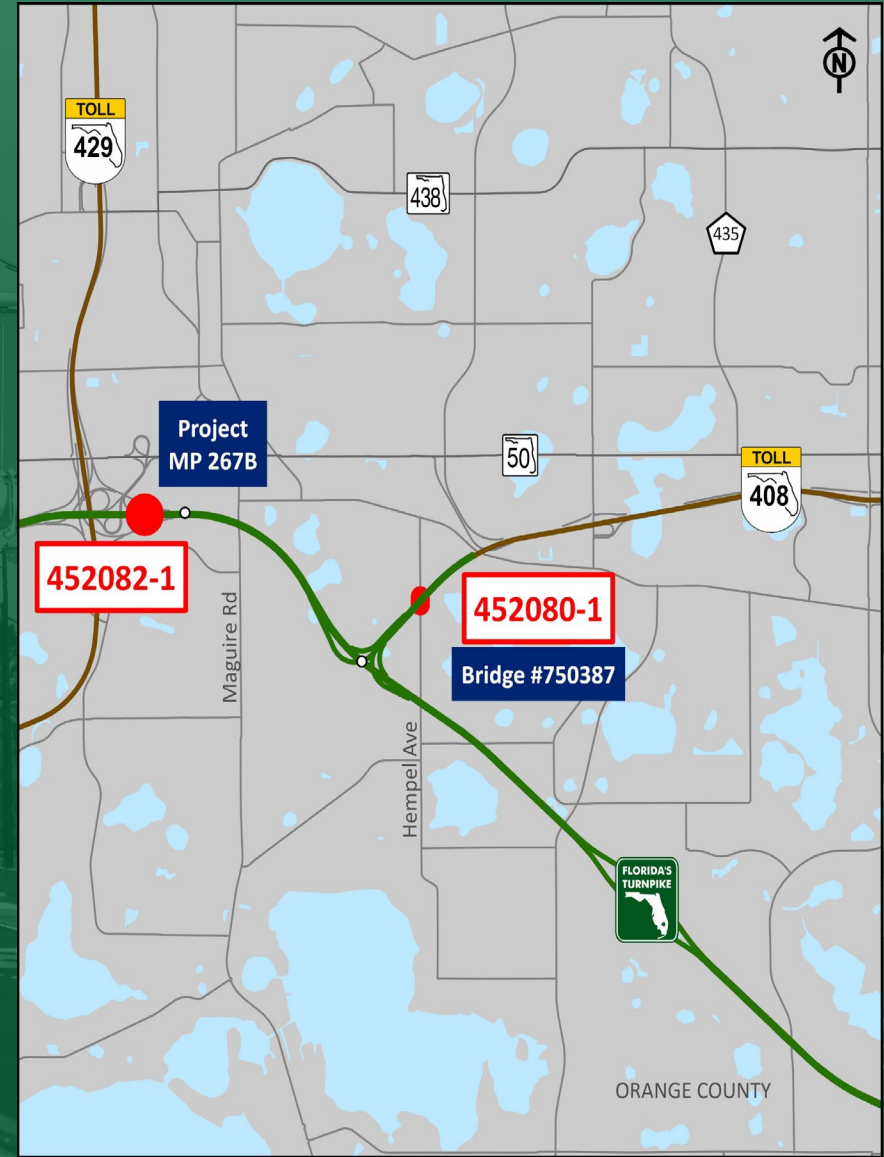

# HPS TO LED LIGHTING CONVERSION TURNPIKEWIDE - PHASE I, WRONG WAY DRIVING DETECTION – SOUTH FLORIDA & WRONG WAY DRIVING DETECTION – CENTRAL FLORIDA

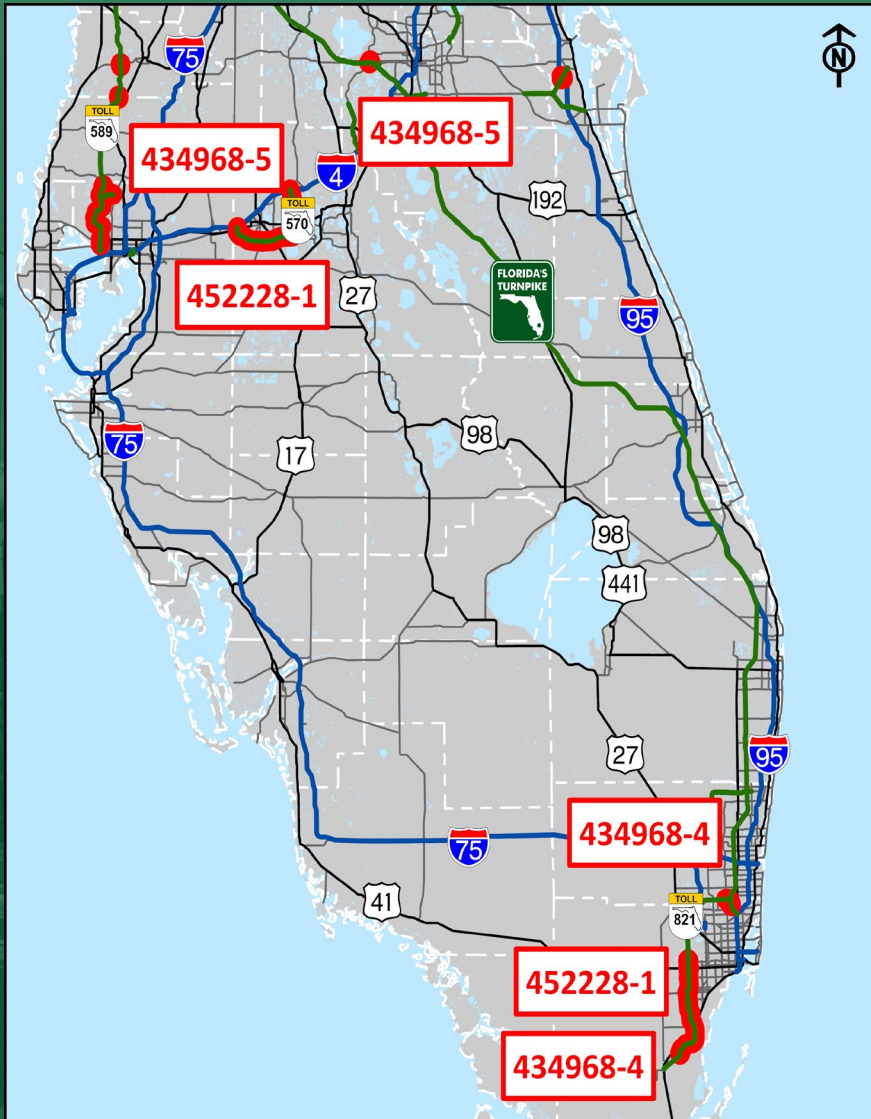

PM	Yared Worku (352) 870-9632
FPID(s)	452228-1-62-01 434968-4-62-01 434968-5-62-01
County/Counties	Turnpike
Anticipated Contract \$	452228-1-62-01 - \$4.35 434968-4-62-01 - \$0.56 434968-5-62-01 - \$0.70
Anticipated Formal Ad	January 2025
Anticipated Contract Execution	April 2025
Anticipated Major/Minor Work Types	10.1

## General Project Description and Key Components

**452228-1** This project will replace existing lighting from High-Pressure Sodium (HPS) luminaires to Light Emitting Diode (LED) luminaries along Turnpike Facilities including Turnpike Mainline (SR 821) from MP 6 to 26, Polk Parkway (SR 570) from MP 0 to MP 24, Turnpike Mainline (SR 91) from MP 54.2 to 69, and Turnpike Mainline (SR 91) from MP 81.6 to 86.9.

**434968-4** This project is part of the Phase V implementation of wrong-way vehicle detection systems at exit ramps along the Homestead Extension of Florida’s Turnpike (HEFT) in Miami-Dade County. This is a statewide implementation of wrong-way driving detection technology to monitor, detect, and deter the driver and notify law enforcement and the Transportation Management Center (TMC) staff for appropriate response.

**434968-5** This project is part of the Phase V implementation of wrong-way vehicle detection systems at exit ramps along the Suncoast Parkway and the Veterans Expressway in Hillsborough County. This is a statewide implementation of wrong-way driving detection technology to monitor, detect, and deter the driver and notify law enforcement and the Transportation Management Center (TMC) staff for appropriate response.

*Dates are subject to change*



An aerial photograph of a multi-lane highway, likely a turnpike, with a green semi-transparent overlay. The text "Tentative FY 2026 Consultant Opportunities" is centered in white. The highway has several lanes in each direction, with a large semi-truck and a car visible. The surrounding area includes trees and some buildings in the distance.

# Tentative FY 2026 Consultant Opportunities



# PD & E Studies



FPID	Project	Anticipated \$
439741-1	HYPOLUXO RD / TURNPIKE MAINLINE (SR91) INTERCHANGE (MP90)	\$2.00
451419-2	PD&E FOR CENTRAL POLK PARKWAY EAST - SR 60 TO US17/92	\$8.50

***Tentative – Subject to Change***

# Design



FPID	Project	Anticipated \$
435789-1	WIDEN TPK(SR91) US301 INTCHG TO I-75 INTCHG (MP304.5-308.9)	\$11.65
446580-1	SR70 / TPK(SR91) INTCHG IMPROVEMENTS (MP 152)	\$2.64
446583-1	WIDEN TPK(SR91) FROM CROSSTOWN PKWY TO SR70 (MP144.58-153.19)	\$18.66
452077-1	WIDEN TPK (SR91) ATLANTIC BLVD TO N OF SAMPLE RD (MP 66-69)	\$26.82

***Tentative – Subject to Change***



FPID	Project	Anticipated \$
406143-6	WIDEN TPK(SR91) OKEECHOBEE BLVD TO SR 710 (4TO8 LNS)	\$11.28
435461-4	WIDEN SAWGRASS (SR869) SAMPLE TO UNIVERSITY DR (MP 12-14.8)(6TO10 LNS)	\$11.64
435461-5	WIDEN SAWGRASS (SR 869) UNIVERSITY DR TO SR7 (MP 14.8-18.4)(6TO10 LNS)	\$10.91
435786-3	WIDEN TPK(SR91) - OBRIEN RD TO US27 (MP 285.8-289.3) (4TO8 LNS)	\$11.01
437155-5	WIDEN SAWGRASS(SR869) S OF NW8TH TO SUNRISE BLVD (MP0-0.5) (6TO10LNS)	\$12.27
437155-6	WIDEN SAWGRASS (SR869) OAKLAND PARK BLVD TO ATLANTIC BLVD (MP 4.1-7.5)	\$14.42
442620-1	SNAPPER CREEK SERVICE PLAZA GENERAL IMPROVEMENTS (MP 19)	\$0.88
442764-3	SUNCOAST II-PHASE 3B (SR589)-CR 495 TO US 19	\$20.83
443879-1	TRUCK PARKING AT CANOE CREEK SERVICE PLAZA (MP 229)	\$2.22
446224-2	TSM&O TPK (SR91) GRIFFIN ROAD INTERCHANGE IMPROVEMENTS (MP 54)	\$1.18
452106-1	TPK (SR91) & US27 LEESBURG SOUTH INTCHG IMPROVEMENTS (MP 285)	\$1.76
452228-2	HPS TO LED LIGHTING CONVERSION TURNPIKEWIDE - PHASE II	\$4.24

***Tentative – Subject to Change***



# Important Web Links

## FTE: Consultant Corner

<https://floridasturnpike.com/business-opportunities/consultant-corner/>

## FDOT: Procurement – Statewide CAP

<https://www.fdot.gov/procurement/cap.shtm>

## FDOT: Procurement – Advertisements

<https://www.fdot.gov/procurement/Advertisements.shtm>

## FTE Design Website

<http://floridasturnpike.com/design.html>

# FTE Contacts

- Alison Stettner, AICP – Transportation Development Director  
alison.stettner@dot.state.fl.us
- Stephanie Sharp, PE – District Program Management Administrator  
stephanie.sharp@dot.state.fl.us
- Brianna Myers, CPM – District Work Program Administrator  
brianna.myers@dot.state.fl.us
- Rachel Panchookian, CEI Manager  
rachel.panchookian@dot.state.fl.us

# Feedback

**We welcome your  
feedback!**

<https://floridasturnpike.com/business-opportunities/consultant-corner/>

## COMMENTS AND QUESTIONS

---

If you would like to submit any comments, questions, or suggestions please complete the form below.

Your Name

Your Email (required)

Subject

Your Message (required)

Send